

13790510059




5

4

3

2

1

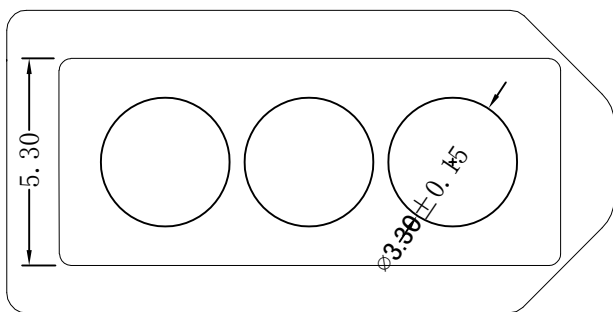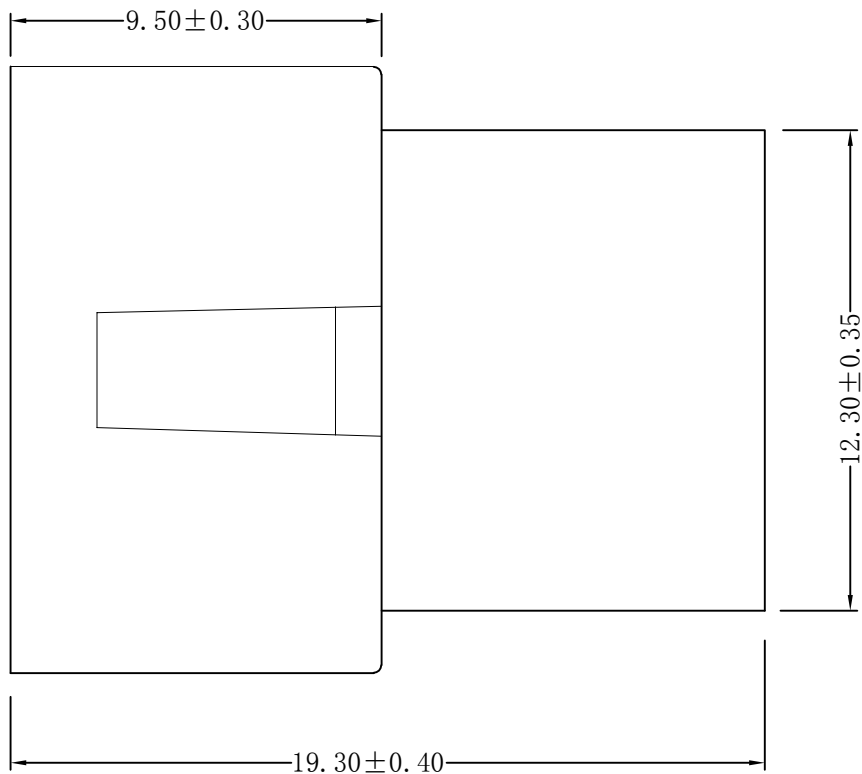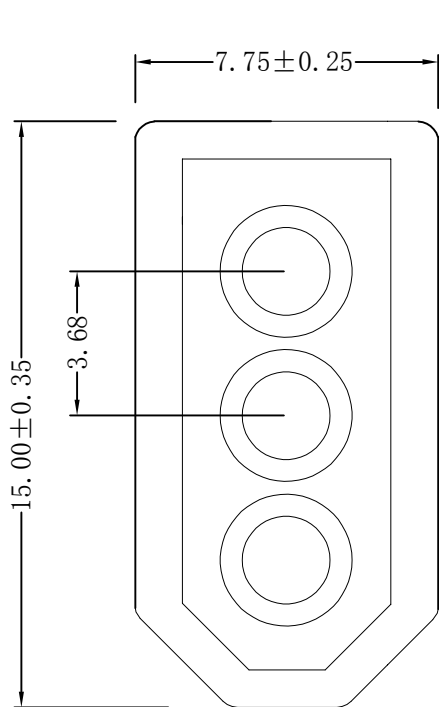

ESTK15800 H - 1*NP X - B - G - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X公胶壳 ↑ NO MARK ↑ A灼热丝750
 ↑ B黑色 ↑ B带扣 ↑ C刺破 ↑ G母胶壳 ↑ B灼热丝850 ↑ X普通料
 ↑ R红色 ↑ 2L示意两侧带锁扣 ↑ U超薄F防呆型 ↑ HV带高凸点 ↑ HF示意无卤
 ↑ Y黄色 ↑ LC带低凸点 ↑ K卡槽 ↑ E有耳 ↑ NF普通含卤
 ↑ G绿色 ↑ C透明 ↑ NE无耳

H示意胶壳,
 H后无数字默认材质V0
 H后带数字2示意材质V2

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Working Temperature: -25°C ~ +85°C
- Contact resistance: 30mΩ Max
- Applicable wire: AWG#18~#22



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: ESTK15800H-1*3PX-B-G

品名 TITLE: 1.58-H(母)

材料: PA66 UL94-V0/V2 单位: MM 包装规格: 比例: 1:1

日期版次 REVISION 日期 DATE 变更内容 DESCRIPTION 核 准 APPROVALBY 制图: 审核: 核准: 日期: 2022. 4. 24

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



6

5

4

3

2

1

HZ