

13790510059






5

4

3

2

1

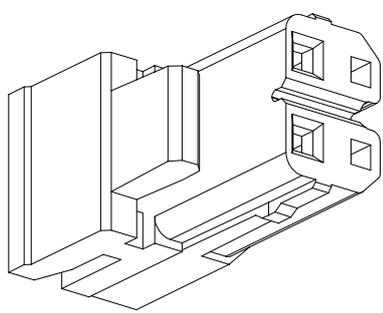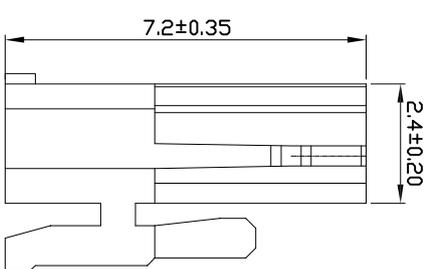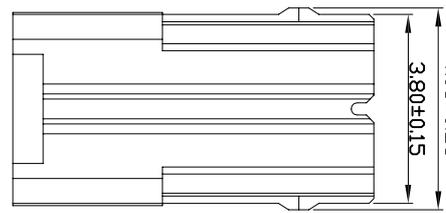

EST1802 H - 1*NP X - B - X - HF - NK - X

↑ 羿通代码+间距

↑ PIN数

↑ 1示意单排
2示意双排

↑ 示意胶壳, 后若无数字默认材质V0
↑ 示意数字2示意材质V2

↑ X 普通
B 带扣
C 侧敲
L 超薄
U 超薄防呆型
HV 带高点
LC 带低点
K 卡槽
NE 无耳

↑ X 公胶壳
G 母胶壳

↑ NO MARK
A 约热丝750
B 约热丝850
X 普通料

↑ HF 示意无齿
NF 普通含齿

NOTES:

1. Material: Nylon66, UL94V-0
2. Color: Natural(White)
3. Current Rating: 4A AC,DC
4. Voltage Rating: 350V AC,DC
5. Temperature Rang: -25°C~+85°C
6. Contact Resistance: 20mΩ Max
7. Insulation Resistance: 1000MΩ Min
8. Withstanding Voltage: 1700V AC/minute



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:EST1802H-1*2PX-B-X

品名 TITLE:1.8-HK(带扣)

材料: 单位: MM

制图: 审核:

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25

包装规格: 比例: 1:1

日期: 2022.4.29

核准:

6

5

4

3

2

1



XR