



13790510059

5

4

3

2

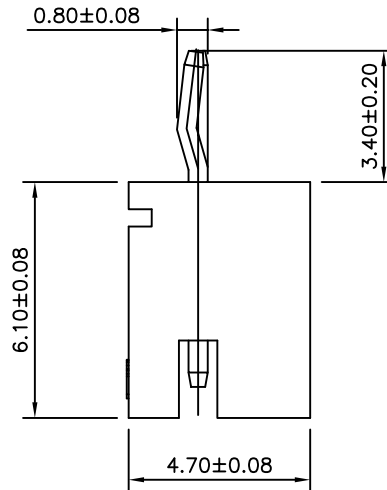
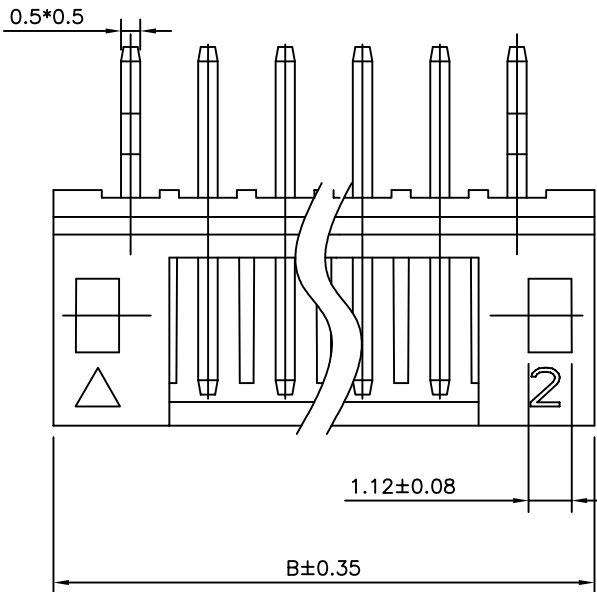


EST2001 W V - 1*NP X - X - X X - NK-HF


普通代码+间距 W 后无0默认材质为V0 V 示意180° 直针, VS立式 X 普通 G为PIN针镀金 焊无点
 1单排 2双排 R 示意90° 弯针, BS卧式 RG高弯 X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 P平弯 D防呆型 2 示意有柱 3 示意无柱 NK为NO MARK MF为有MARK S为PIN针镀锡 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

F
E
D
C
B
A

F
E
D
C
B
A

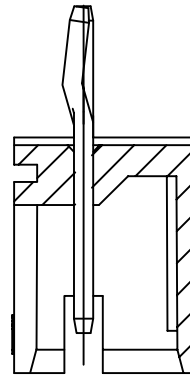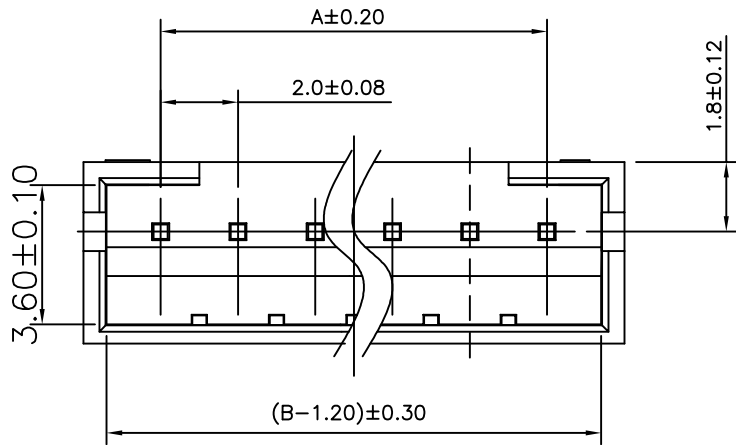

Recommended P.C.B Layout (Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)




PART NO.	Dimensions	
	A	B
2P	2.00	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

NOTES:

MATERIAL: PA66UL94V-0
 CONTACT: BRASS, TIN PLATED
 CURRENT RATING: 2A AC/DC
 VOLTAGE RATING: 100V AC/DC
 TEMPERATURE RANGE: -25°C~+85°C
 CONTACT RESISTANCE: 20mΩ MAX
 INSULATION RESISTANCE: 1000MΩ MIN
 WITHSTANDING VOLTAGE: 800V AC/MINUTE
 FLASH: 0.05MAX; WARPAGE: 0.08MAX

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2001WV-1*NPX-K

品名 TITLE: PH2.0-Wafer180°(打K)

材料: PA66UL94V-0	单位: MM	包装规格: 1K/包	比例: 1:1
制图: LI	审核: LI	核准: LI	日期: 2022/05/11


一般公差
GENERAL TOLERANCE

X.X ±0.15

X.XX ±0.10

X.XX ±0.05

ANGLE ±1°



6

5

4

3

2

1