

13790510059


5

4


3

2


1

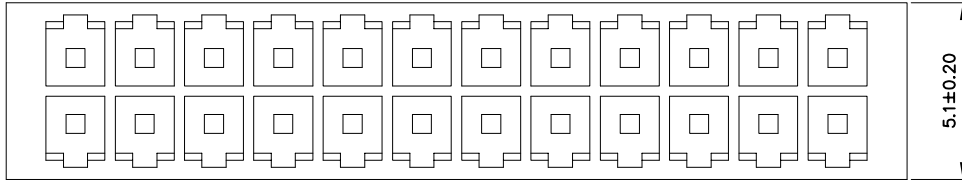

5.1±0.20

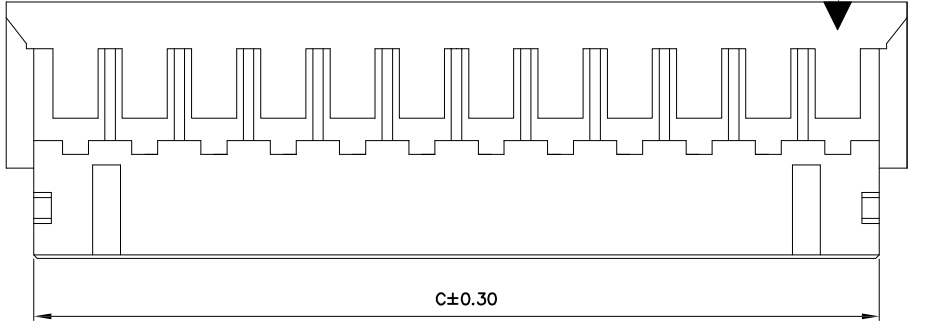


C±0.30



7.4±0.25

4.2±0.20

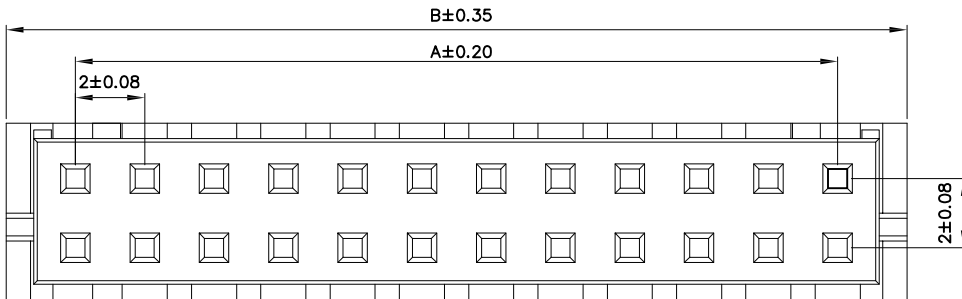

B±0.35

A±0.20

2±0.08

2±0.08

EST2002 H - 2*NP X - X - X - HF-NK - X

EST 2002: 羿通代码+间距
 H: H示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2
 2*NP: 1示意单排, 2示意双排
 X: X本色, X普通, X公胶壳, X母胶壳, X约热丝750, X普通料
 NP: N黑色, P白色
 X: X本色, X普通, X公胶壳, X母胶壳, X约热丝750, X普通料
 C: C铜板, 2L示意两脚带锁扣, A约热丝750
 L: L铝带, 1示意两脚带锁扣, B约热丝850
 LC: LC带低凸点
 HF: HF示意无齿, X普通齿齿
 NK: K卡槽, NE: NE无耳
 NO MARK: NO MARK
 X: X约热丝750, X普通料

Poles	Dimension(mm)		
	A	B	C
2*2	2.00	6.00	4.50
2*3	4.00	8.00	6.50
2*4	6.00	10.00	8.50
2*5	8.00	12.00	10.50
2*6	10.00	14.00	12.50
2*7	12.00	16.00	14.50
2*8	14.00	18.00	16.50
2*9	16.00	20.00	18.50
2*10	18.00	22.00	20.50
2*11	20.00	24.00	22.50
2*12	22.00	26.00	24.50
2*13	24.00	28.00	26.50
2*14	26.00	30.00	28.50
2*15	28.00	32.00	30.50
2*16	30.00	34.00	32.50
2*17	32.00	36.00	34.50
2*18	34.00	38.00	36.50
2*19	36.00	40.00	38.50

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: PA66 UL94-V0

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2002H-2*NPX-X-X

品名 TITLE: PHD-H

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022.5.20

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



XR