


Recommended P.C.B Layout  
General Tolerance±0.05

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*02	2.00	8.00	4.60	2*12	22.00	28.00	24.60
2*03	4.00	10.00	6.60	2*13	24.00	30.00	26.60
2*04	6.00	12.00	8.60	2*14	26.00	32.00	28.60
2*05	8.00	14.00	10.60	2*15	28.00	34.00	30.60
2*06	10.00	16.00	12.60	2*16	30.00	36.00	32.60
2*07	12.00	18.00	14.60	2*17	32.00	38.00	34.60
2*08	14.00	20.00	16.60	2*18	34.00	40.00	36.60
2*09	16.00	22.00	18.60	2*19	36.00	42.00	38.60
2*10	18.00	24.00	20.60	2*20	38.00	44.00	40.60
2*11	20.00	26.00	22.60				

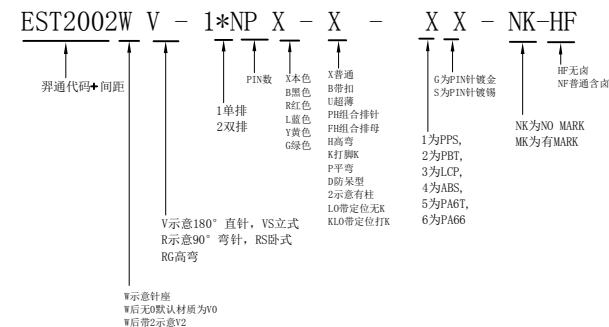

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C~+85°C
- Contact resistance: 10mΩ Max



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2002RV-2\*NPX-B

品名 TITLE: PHD2.0 弯针 (高脚带扣)

材料: 单位: MM 包装规格: 比例: 1:1  
制图: 审核: 核准: 日期: 2022. 6. 8

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

