

13790510059




5

4


3

2

1

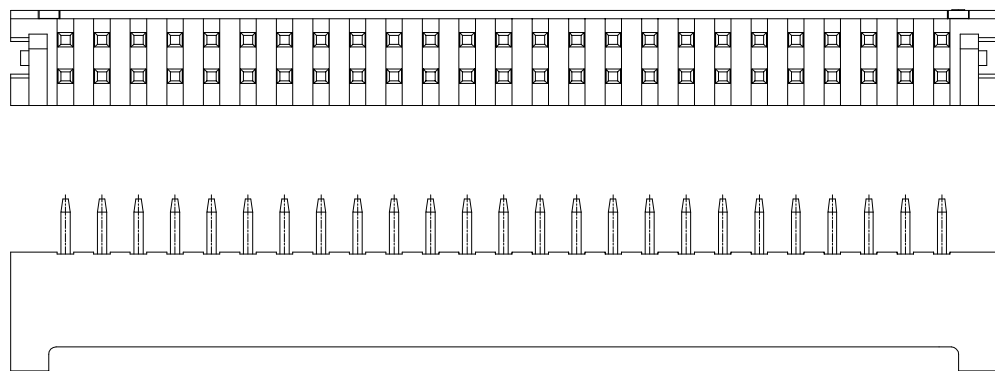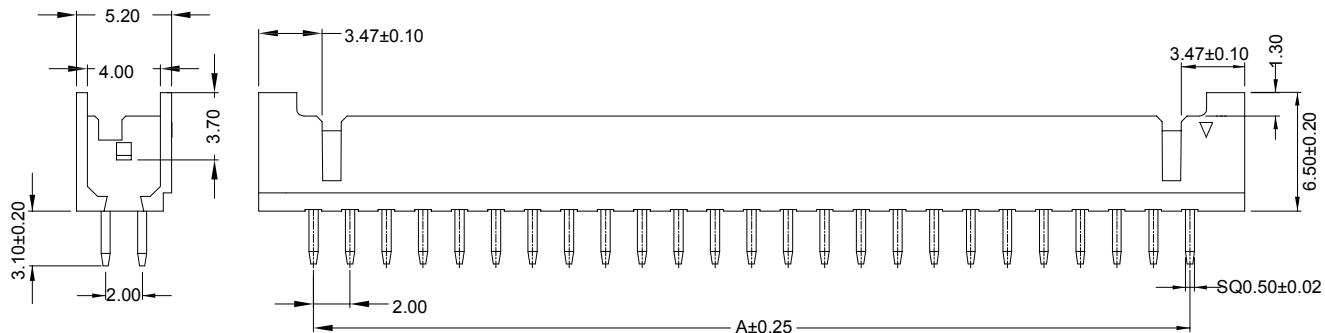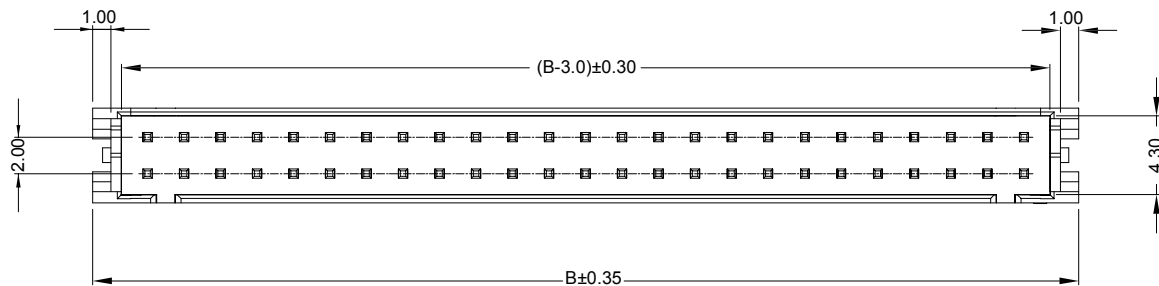

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*2	2.00	8.00	2*14	26.00	32.00
2*3	4.00	10.00	2*15	28.00	34.00
2*4	6.00	12.00	2*16	30.00	36.00
2*5	8.00	14.00	2*17	32.00	38.00
2*6	10.00	16.00	2*18	34.00	40.00
2*7	12.00	18.00	2*19	36.00	42.00
2*8	14.00	20.00	2*20	38.00	44.00
2*9	16.00	22.00	2*21	40.00	46.00
2*10	8.00	24.00	2*22	42.00	48.00
2*11	20.00	26.00	2*23	44.00	50.00
2*12	22.00	28.00	2*24	46.00	52.00
2*13	24.00	30.00	2*25	48.00	54.00

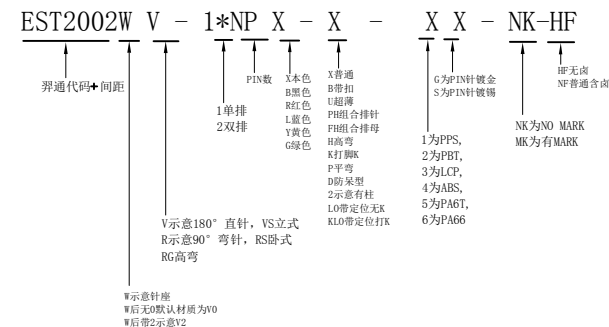

■ SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:800V AC/minute
- Insulation resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:10mΩ Max


日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2002WV-2*NPX-X			
品名 TITLE: PHD2.0直针			
材料	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022. 6. 11

一般公差 GENERAL TOLERANCE	X.X ±0.25
	X.XX ±0.20
ANGLE	±1°



6

5

4

3

2

1

JSW