





13790510059

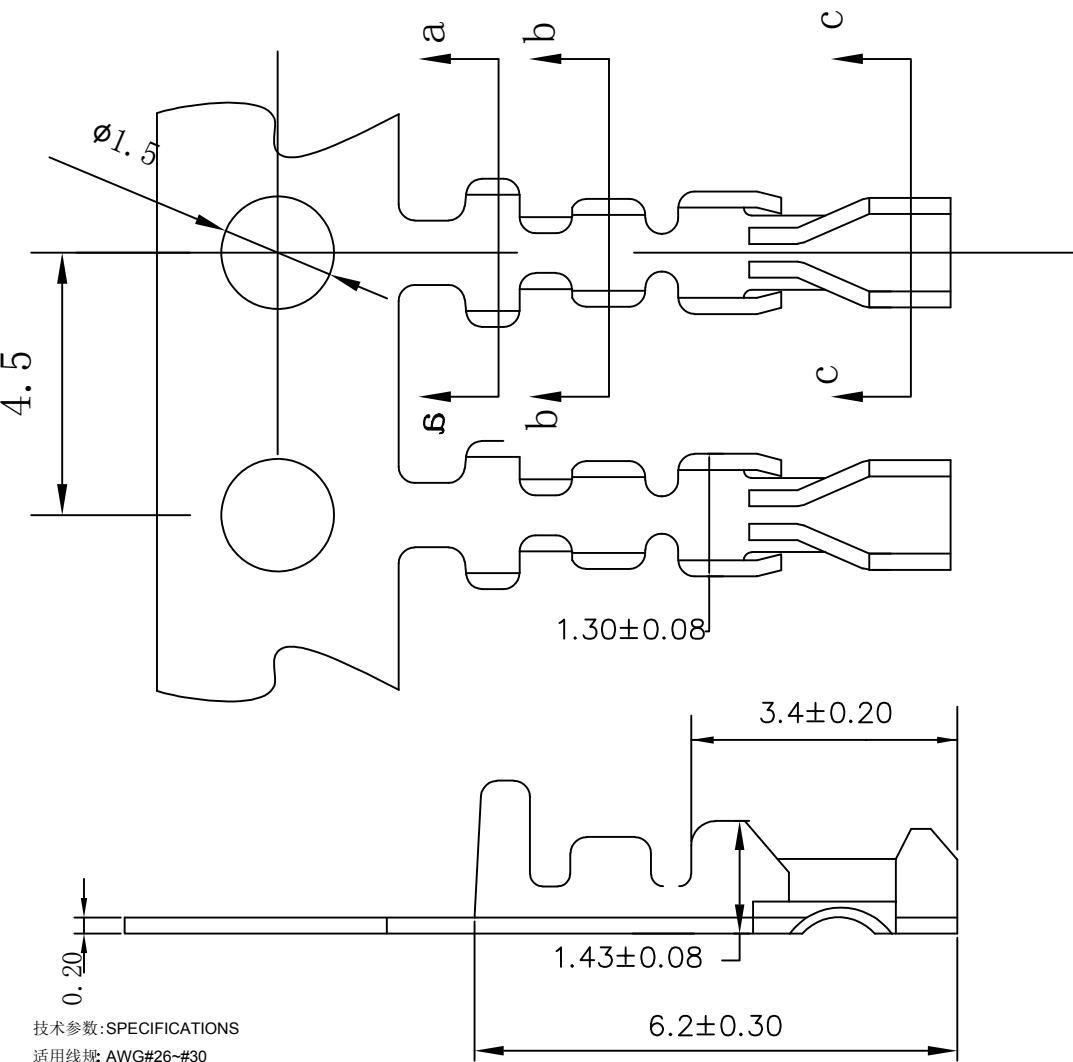

a-a SECTION




c-cSECTION

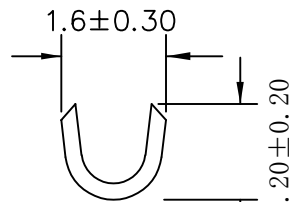

b-b SECTION

EST2004 T P X - 1G X- X

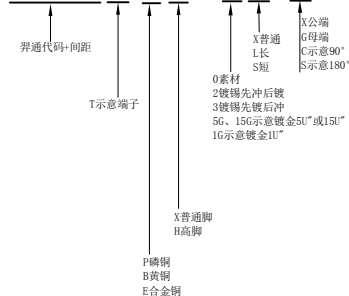

插拔力标准

- A. 2*5PIN以下紧端, 拨出力150~300G;
- B. 2*5PIN~2*10PIN普通, 拨出力100~200G
- C. 2*10PIN以上松端, 拨出力60~120G

技术参数: SPECIFICATIONS


适用线规: AWG#26~#30
 Applicable wire: AWG#26~#30
 额定电压: 250V DC/AC (有效值)
 Voltage rating: 250V DC/AC (rms)
 额定电流: 2.5-1.0A
 Current rating: 2.5-1.0A
 耐压值: 800V AC(有效值)
 Withstand voltage: 800V AC(rms)
 工作温度: -25℃~+85℃
 Working Temperature: -25℃+85℃
 绝缘电阻: ≥1000MΩ
 Insulation resistance: ≥1000MΩ
 接触电阻: ≤0.02Ω
 Contact resistance: ≤0.02Ω

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004TPX-1GX-G		一般公差 GENERAL TOLERANCE	
品名 TITLE: DB2.0-T		X.X ±0.15	
材料: 磷铜	单位: MM	包装规格: 10K/卷	比例: 1:1
日期: 2022/5/31	制图: 李建	审核: 李园	核准: 李海平



6

5

4

3

2

1