

13790510059




5

4

3

2

1

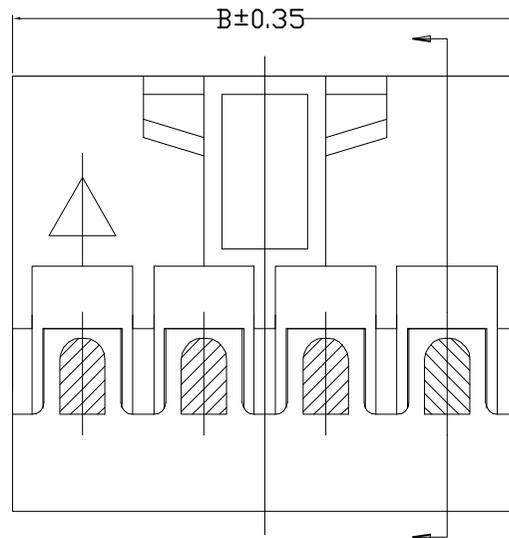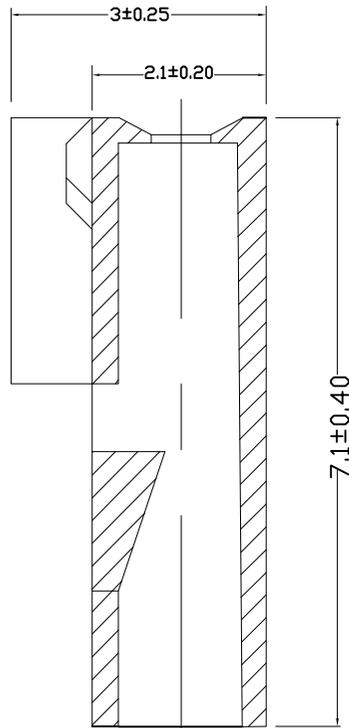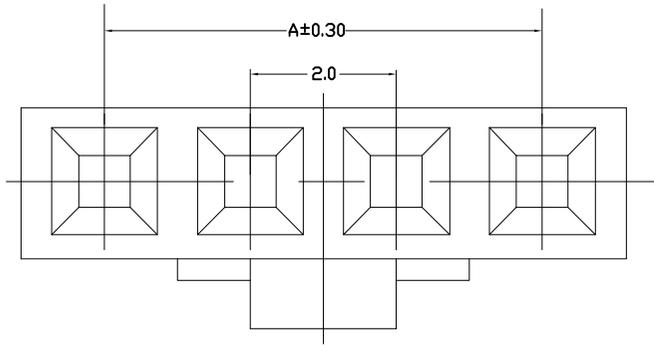

EST2004 H - 1*NP B - F - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X 公胶壳 ↑ NO MARK ↑ A 灼热丝750

↑ X 普通 ↑ B 带扣 ↑ G 母胶壳 ↑ B 灼热丝850

↑ C 刺破 ↑ 2L 示意两侧带锁扣 ↑ HV 带高凸点 ↑ HF 示意无卤 ↑ X 普通料

↑ L 蓝色 ↑ U 超薄 ↑ LC 带低凸点 ↑ NF 普通含卤

↑ Y 黄色 ↑ G 绿色 ↑ C 透明 ↑ K 卡槽 ↑ E 有耳

H 示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2

PART NO.	Dimensions		Pcs/Bag
	A	B	
02P	2.0	4.25	1000
03P	4.0	6.25	1000
04P	6.0	8.25	1000
05P	8.0	10.25	1000
06P	10.0	12.25	1000
07P	12.0	14.25	1000
08P	14.0	16.25	1000
09P	16.0	18.25	1000
10P	18.0	20.25	1000
11P	20.0	22.25	1000

Featrues
 Part No:
 Poles:0,2-11
 Material:PA66 UL-94V0
 Rated Voltage:130V AC,DC
 Rated current:1A AC,DC
 Withstanding voltage:800V AC/Minute
 Contact Resistance:20M (Max)
 Insulation Resistance:1000M (Min)
 Temperature Range:-25°C±+85°C

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004H-1*NPB-F

品名 TITLE: DB2.0-H单排(防呆)

材料: PA66	单位: MM	包装规格:	比例: 1:1	一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.25 ANGLE ±1°
制图:	审核:	核准:	日期: 2022.6.6	

6

5

4

3

2

1

YZ