

13790510059




5

4

3

2

1

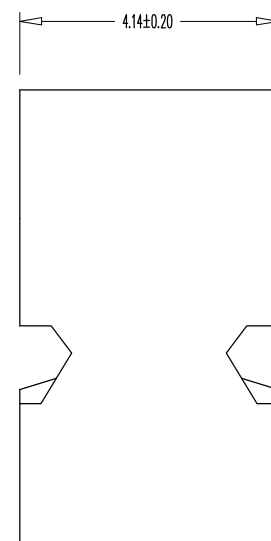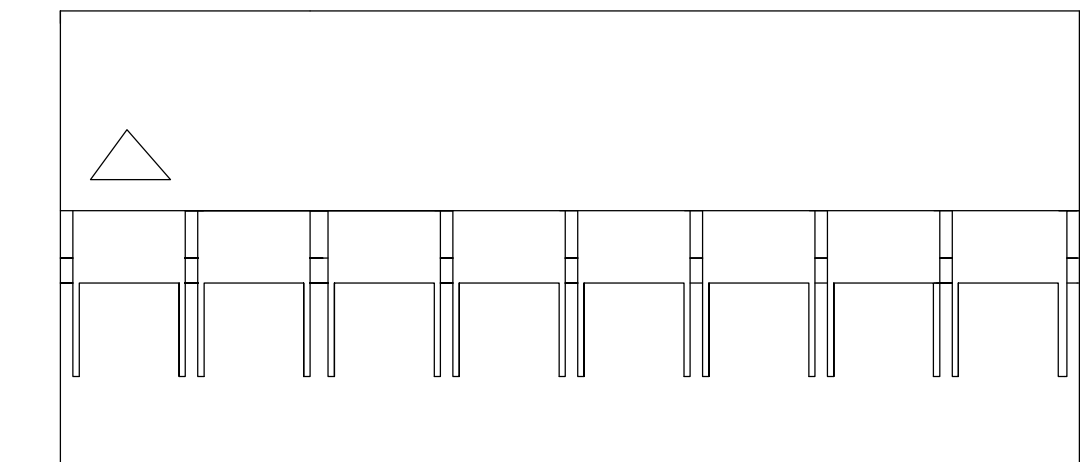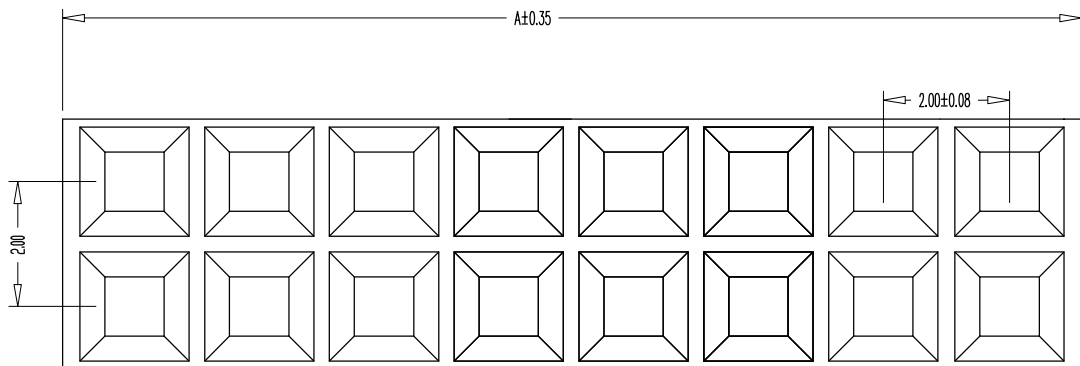

EST2004 H - 1*NP X - X - X - HF - NK - X

羿通代码+间距

PIN数
1示意单排
2示意双排

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点
K卡槽
E有耳

X公胶壳
G母胶壳

NO MARK

A灼热丝750
B灼热丝850
X普通料

HF示意无卤
NF普通含卤

POLES	A	POLES	A
2*2	4.3	2*14	28.3
2*3	6.3	2*15	30.3
2*4	8.3	2*16	32.3
2*5	10.3	2*17	34.3
2*6	12.3	2*18	36.3
2*7	14.3	2*19	38.3
2*8	16.3	2*20	40.3
2*9	18.3	2*21	42.3
2*10	20.3	2*22	44.3
2*11	22.3	2*23	46.3
2*12	24.3	2*24	48.3
2*13	26.3	2*25	50.3

- SPECIFICATIONS**
- Voltage rating: 250V AC/DC;
 - Current rating: 3A AC/DC;
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004H-2*NPX-X-X		一般公差 GENERAL TOLERANCE	
品名 TITLE: DB2.0-H(双排)		X.X ±0.25	
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022.6.6
X.X ±0.20		X.XX ±0.20	
ANGLE ±1°			

6

5

4

3

2

1

XJS