


| POLES | A | POLES | A |
|-------|------|-------|------|
| 2*2 | 4.3 | 2*14 | 28.3 |
| 2*3 | 6.3 | 2*15 | 30.3 |
| 2*4 | 8.3 | 2*16 | 32.3 |
| 2*5 | 10.3 | 2*17 | 34.3 |
| 2*6 | 12.3 | 2*18 | 36.3 |
| 2*7 | 14.3 | 2*19 | 38.3 |
| 2*8 | 16.3 | 2*20 | 40.3 |
| 2*9 | 18.3 | 2*21 | 42.3 |
| 2*10 | 20.3 | 2*22 | 44.3 |
| 2*11 | 22.3 | 2*23 | 46.3 |
| 2*12 | 24.3 | 2*24 | 48.3 |
| 2*13 | 26.3 | 2*25 | 50.3 |

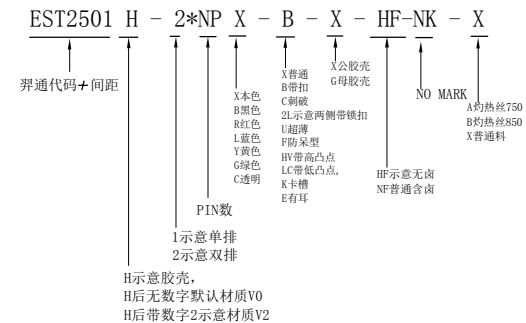

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max

| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVALBY |
|------------------|------------|---------------------|-------------------|
| | | | |
| | | | |
| | | | |



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

| | | | |
|-------------------------------|--------|---------------------------|--------------|
| 料号PART NO: EST2004H-2*NPB-F-X | | 一般公差 GENERAL TOLERANCE | |
| 品名 TITLE: DB2.0-H(双排3凸) | | X.X ±0.25 | |
| 材料: | 单位: MM | 包装规格: | 比例: 1:1 |
| 制图: | 审核: | 核准: | 日期: 2022.6.7 |

| | |
|-------|-----|
| ANGLE | ±1° |
| | |