

SPECIFICATIONS

Current Rating: 1Amps

Insulator Resistance: 5000Megohms min.

Dielectric Withstanding: AC 500V

Contact Material: Brass

Operating Temperature: -40° ~ +105°C

Max Processing Temp: 230° TO 260° for 30-60 seconds


Insulator Material: NYLON-6T

PLATING: GOLD FLASH

UNSPECIFIED TOLERANCE: ±0.20

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

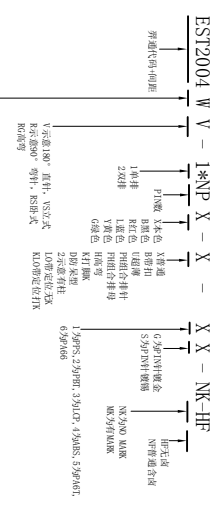

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004WV-1*NPB-X

品名 TITLE: DB2.0直针 (单排)

材料: 单位: MM

包规格: 比例: 1:1

日期: 2022.6.12

一般公差	
GENERAL TOLERANCE	±0.25
X.X	±0.25
X.XX	±0.20
ANGLE	±1°

日期版次	日期	变更内容	核准
REVISION	DATE	DESCRIPTION	APPROVALBY