

13790510059





5

4

3

2

1

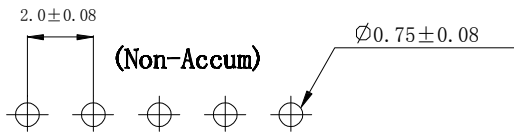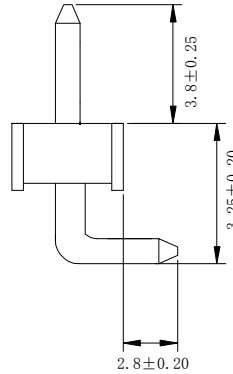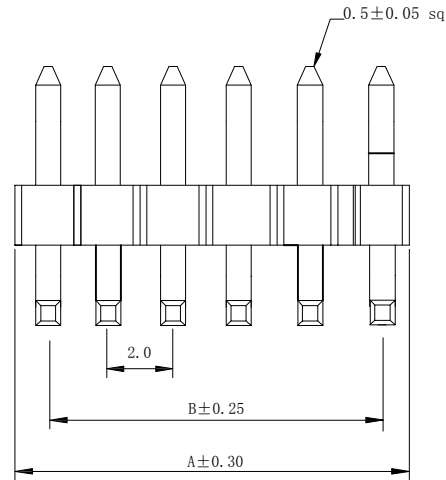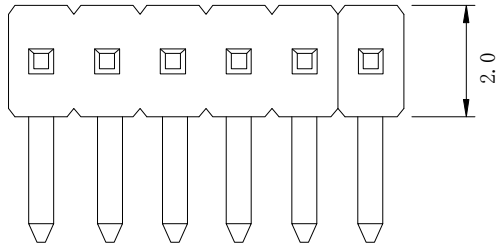

EST2004 W R - 2*NP X - X - X X - NK - HF

EST: 羿通代码+间距
 W: 示意针座
 R: 若无0则表示材料为P0
 NP: 1单排, 2双排
 X: X本色, B黑色, R红色, L蓝色, Y黄色, G绿色
 X: X普通, B带扣, U超薄
 NP: 1为PIN针镀金, 2为PIN针镀锡
 NK: NK为NO MARK, NK为有MARK
 HF: 即无齿, NF普通含齿
 V: 示意180°直针, VS立式
 R: 示意90°弯针, RS卧式
 RG: 高弯
 S: 示意180°直针, VS立式
 R: 示意90°弯针, RS卧式
 K: 打脚
 D: 防呆型
 L: 0带定位柱
 K: 0带定位柱
 L: 0带定位柱
 K: 0带定位柱
 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

SPECIFICATIONS

Current rating: 1Amps
 Insulator Resistance: 5000Megohms min
 Dielectric withstanding: AC 500V
 Contact material: Brass
 Operating temperature: -40~+105°C
 Max processing temp: 230° To 260° for 30-60 seconds
 Insulator material: nylon-6T
 PLTATING: GOLD FLASH
 UNSPECIFIED TOLERANCE: ±0.20

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2004WR-1*NPB-X
 品名 TITLE: DB2.0弯针单排
 材料: 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2022.6.11

一般公差
 GENERAL TOLERANCE
 X, X ±0.25
 X, XX ±0.20
 ANGLE ±1°