

13790510059



5

4


3

2



1

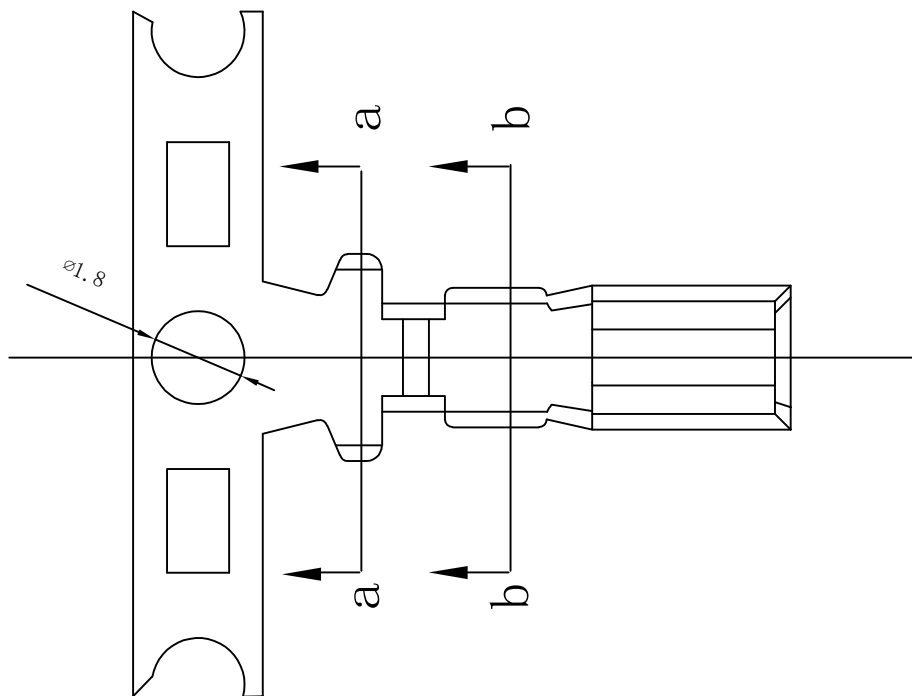

a-a




b-b

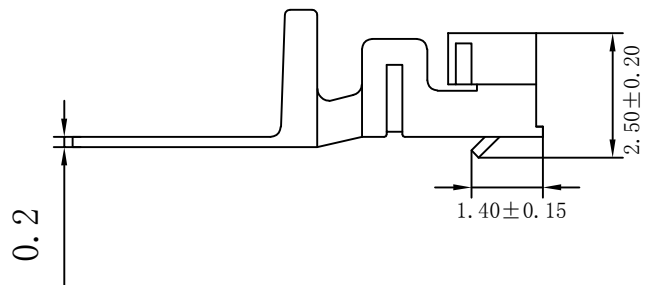

技术参数: SPECIFICATIONS

- 适用线规: AWG#22-#28
Applicable wire: AWG#88-#28
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 2.5-1.0A
Current rating: 2.5-1.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- 接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$

EST2005 T P X - 2 X - G

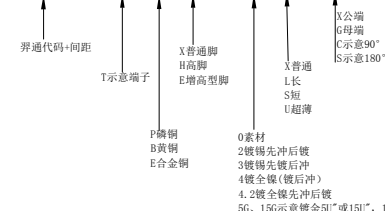

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2005TPX-2X-G

品名 TITLE: JAE2.0-T(母)

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022.6.11

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



EST