


13790510059

5

4

3

2

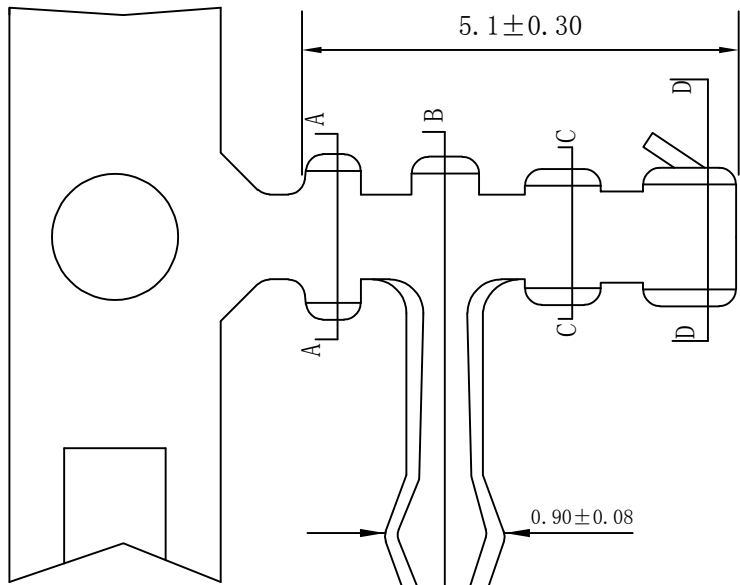

5.1 ± 0.30

0.90 ± 0.25

1.50 ± 0.15

2.05 ± 0.12

d-d SECTION

0.90 ± 0.08

5.6 ± 0.30

b-bSECTION

2.0 ± 0.30

1.8 ± 0.25

a-a SECTION

1.55 ± 0.25

1.25 ± 0.20

c-c SECTION

EST2007 T B X - 2 L - C

↑ 羿通代码+间距

↑ T示端子

↑ X普通脚
H高脚
E增高型脚

↑ X普通
L长
S短
U超脚

↑ P磷铜
B黄铜
E合金铜

↑ 0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

技术参数: SPECIFICATIONS

- 适用线规: AWG#26-#28
Applicable wire: AWG#26-#28
- 额定电压: 250V DC/AC (有效值)
Voltage rating: 250V DC/AC (rms)
- 额定电流: 2.0A
Current rating: 2.0A
- 耐压值: 800V AC(有效值)
Withstand voltage: 800V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃+85℃
- 绝缘电阻: ≥1000MΩ
Insulation resistance: ≥1000MΩ
- 接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2007TBX-2L-C

品名 TITLE: SAN90°-T长

材料: C2680

单位: MM

包装规格: 10K/卷

比例: 1:1

制图:


审核:

核准:

日期: 2022/06/13

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.15
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



EST