

6

5

4

3

2

1

F

F

E

E

D

D

C

C





B

B

A

A

PART NO	dimensions	
	A	B
2P	4.70	8.15
3P	6.70	12.15
4P	8.70	14.15
5P	10.70	16.15
6P	12.70	18.15
7P	14.70	20.15
8P	16.70	22.15

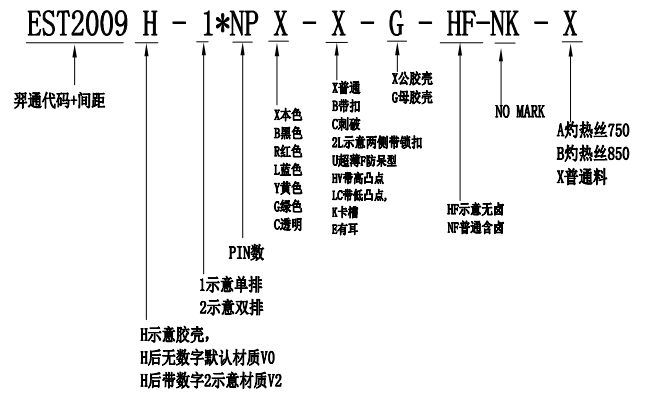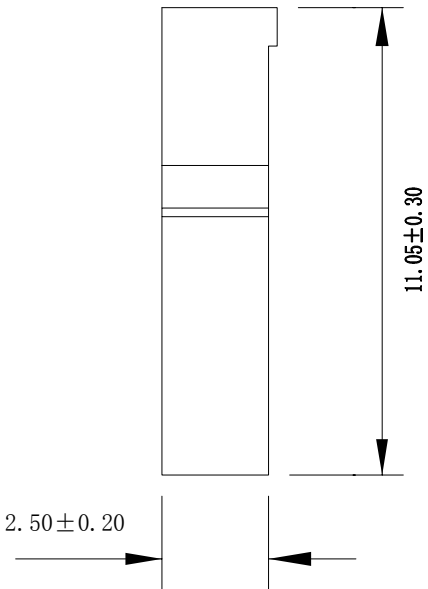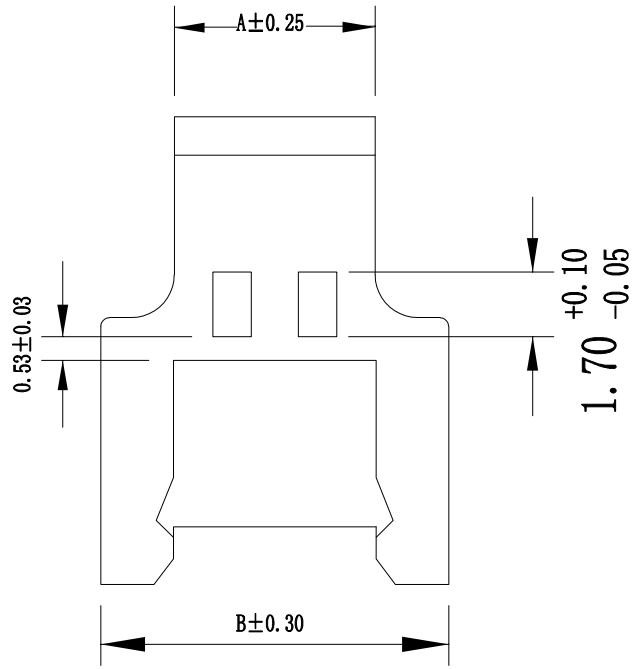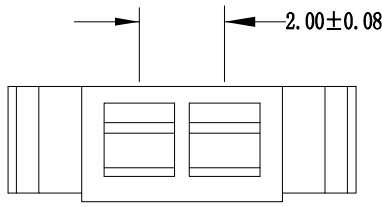


- SPECIFICATIONS**
- Voltage rating: 125V AC/DC;
 - Current rating: 2A AC/DC;
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 800MΩ Min
 - Temperature range: -25°C ~ +105°C
 - Contact resistance: 20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2009H-1*NPX-X-G		一般公差 GENERAL TOLERANCE	
品名 TITLE: 51006-H(母)		X.X ±0.35	
材料: PA66	单位: MM	包装规格: 10K/包	X.XX ±0.20
制图:	审核:	核 准:	ANGLE ±1°
日期: 2022/6/14			

6

5

4

3

2

1

EST