


Board Layout
General Tolerance: ±0.05

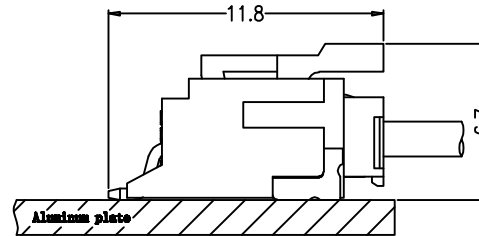

C	SOLDER TAB	2 PCS	Brass	Sn-plated
B	CONTACT	1~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94-V0 COLOR: BELGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

Circuits	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	8.00	2.00	2.50	4.90
03	10.00	4.00	2.50	6.90
04	12.00	6.00	3.50	8.90
05	14.00	8.00	5.50	10.90
06	16.00	10.00	7.50	12.90
07	18.00	12.00	9.50	14.90
08	20.00	14.00	11.50	16.90
09	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	36.00	30.00	15.50	32.90

EST2010 W RS - 1*NP X - X - X X - NK-HF

EST: 零件代码
 W: 1单排, 2双排
 RS: 180°直针, VS: 90°弯针, RS: 高弯
 NP: 1本色, 2黑色, 3红色, 4蓝色, 5黄色, 6绿色
 X: X普通, D带扣, P: PH组合排母, H: 高弯, K: 打脚, D: 防呆型, 2: 示意有柱, LO: 带定位无K, KLO: 带定位包TR
 X X: G为PIN针镀金, S为PIN针镀锡
 NK: NK为NO MARK, MK为有MARK
 HF: HF无齿, NP普通含齿
 1为PDS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
 W: 示意针座
 W后无: 默认材质为V0
 W后带2: 示意V2

主要技术参数 Main Specifications

- 插 数 (Poles): 03 to 16
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): >math>\geq 1000M\Omega</math>
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 1000V AC/minute
- 温度范围 (Temperature Range): -25°C ~ +105°C

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2010WRS-1*NPX-X

品名 TITLE: PHS2.0卧贴

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022.06.18

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

