

13790510059




5

4

3

2

1


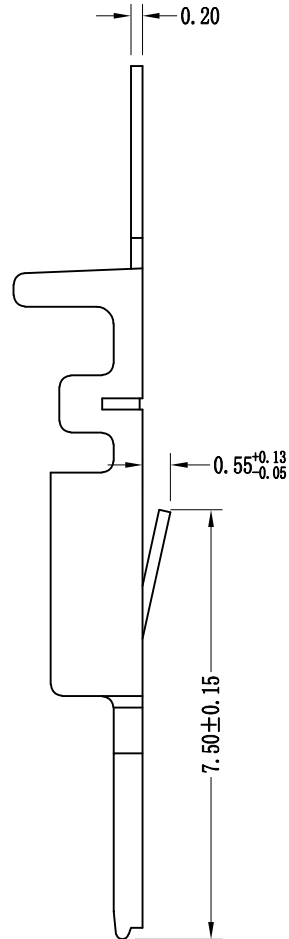
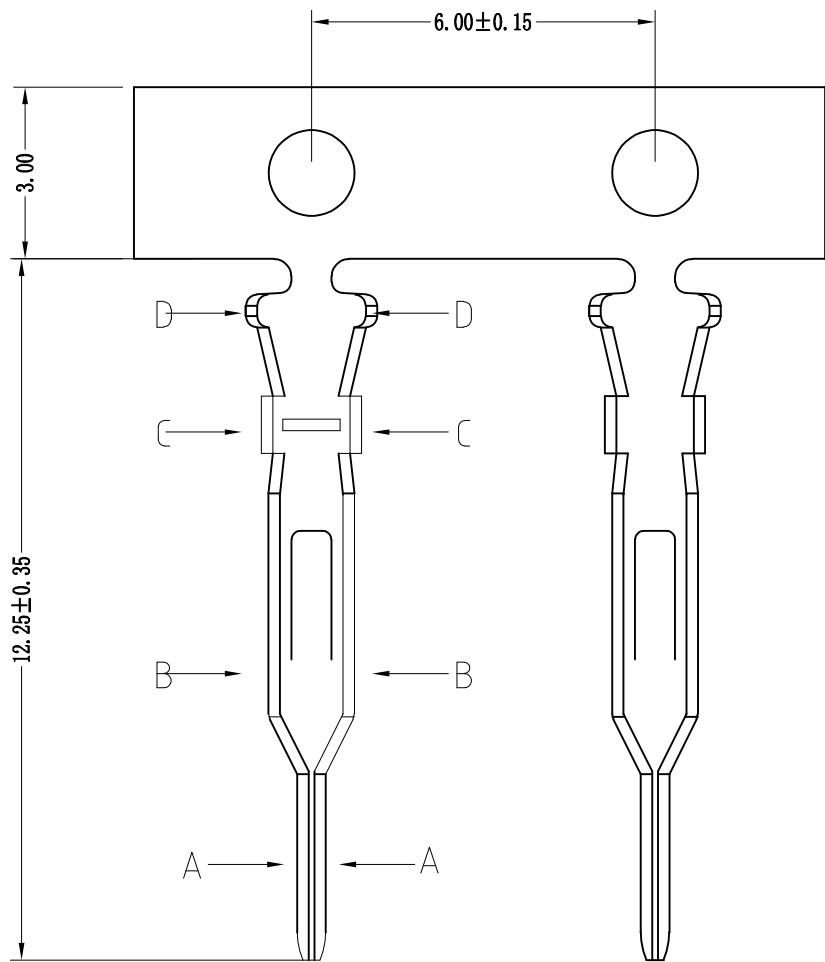


EST2011 T P X - 2 S - X

- ↑ 羿通代码+间距
 - ↑ T示意端子
 - ↑ X普通脚
H高脚
 - ↑ X普通
L长
S短
 - ↑ X公端
G母端
C示意90°
S示意180°
- 0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U",
1G示意镀金1U"
- P 冲
B 冲
E 冲

Technical parameters

- (1) Rated Voltage:250V DC/AC(RMS)
- (2) Rated Current:3A AC.DC
- (3) Withstanding voltage:1000V AC/Minute
- (4) Working Temperature:-25° to+85°
- (5) Plating specification:Sn60u⁺⁶⁰₋₅ Ni15u⁺³⁰₋₅
- (6) Material:Phos.bronze Tin/Plated
- (7) Applicable wires AWG#24~AWG#28



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2011TPX-2S-X

品名 TITLE: PHB-T(冲)

材料 C5191

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022.4.21

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



EST