



13790510059

5

4



3

2

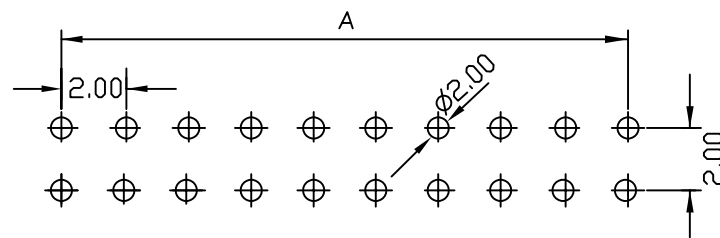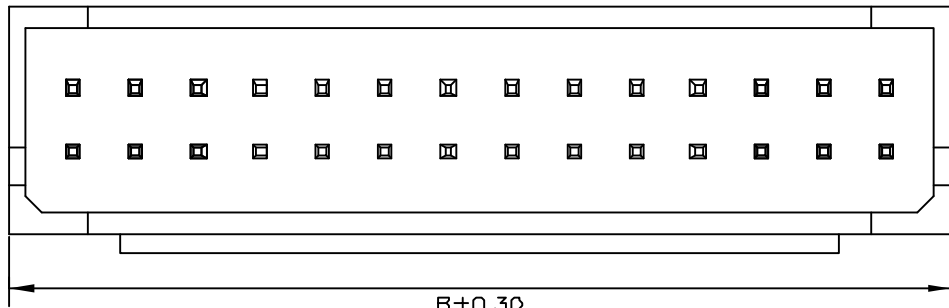

PCB LAYOUT TOLERANCE:±0.05

Poles	A	B
4	2.00	6.00
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

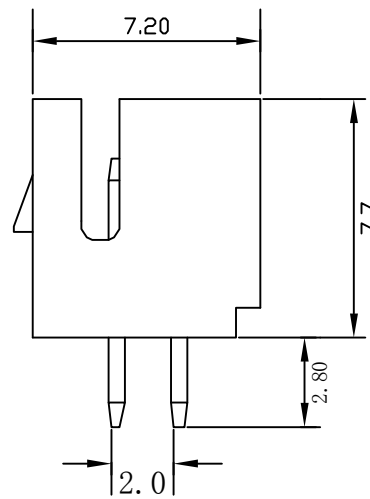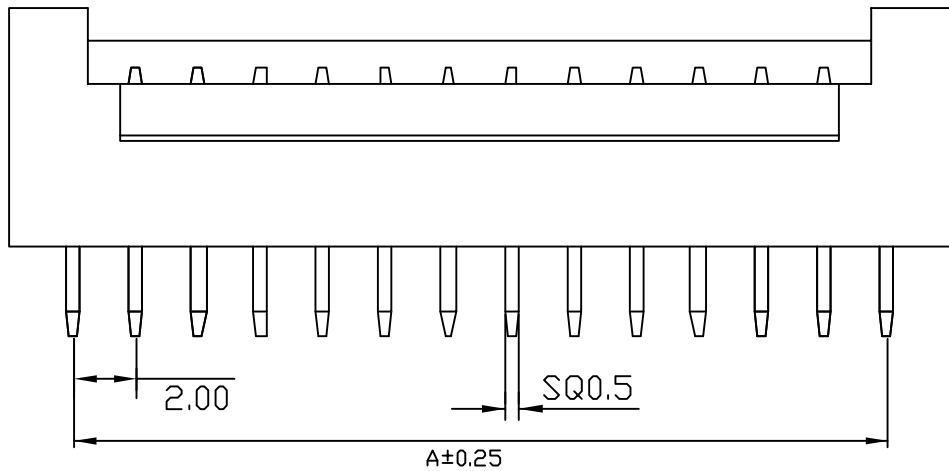

EST2011 W R - 2*NP X - X - X X - NK-HF

↑ 非通代码+间距 ↑ PIN数 X本色 X普通 G为PIN针镀金 ↑ 插无点 NF普通含点
 ↑ 1单排 2双排 B蓝色 B带扣 S为PIN针镀锡 ↑ NK为NO MARK MK为有MARK
 ↑ R红色 L蓝色 Y黄色 F组合排母 H高弯 K打脚款 D脚架型 2示意有柱 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
 ↑ V示意180°直针, VS立式 R示意90°弯针, RS卧式 LO带定位无K KLO带定位打K
 ↑ RG高弯 2示意有柱 6为PA66

↑ 示意针座
 ↑ 若无0默认材质为V0
 ↑ 后带2示意V2

Specifications

Current rating: 2A
 Voltage rating: 100V AC,DC
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 800V AC 1
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -25°C to +85°C

Materials:
 Contact Material: Brass(Sn plating)
 Insulation Material: PA66 UL94-V0 (YL)

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2011WV-2*NPX-B			
品名 TITLE: PHB直针 (宽扣)			
材料Material: PA66	单位: MM	包装规格: 1K/包	比例: 1:1
制图:	审核:	核准:	日期: 2022.6.19

一般公差 GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
X, XXX ±0.15
ANGLE ±1°



XR