
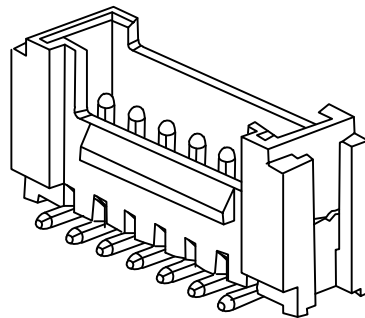


POLES	A	B
2	8.00	2.00
3	10.00	4.00
4	12.00	6.00
5	14.00	8.00
6	16.00	10.00
7	18.00	12.00
8	20.00	14.00
9	22.00	16.00
10	24.00	18.00
11	26.00	20.00
12	28.00	22.00
14	30.00	24.00

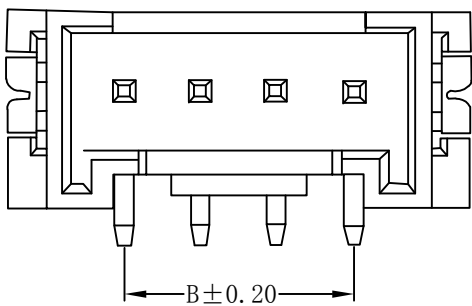

EST20011 W VS - 2\*NP X - B - 6S - NK-HF

↑ 羿通代码+间距      ↑ PIN数      X本色      X普通      ↑ 6S      NK为NO MARK      HF无卤  
 1单排      2双排      B黑色      B带扣      U超薄      NF普通含卤  
 L蓝色      PH组合排针      FH组合排母      MK为有MARK  
 Y黄色      H高弯      P平弯      XG中的X示意尼龙料,  
 G绿色      V示意180°直针, VS立式      1为PPS, 2为PBT, 3为LCP, 4为ABS,  
 R示意90°弯针, RS卧式      5为PA6T,      6为PA66  
 W示意针座      G示意PIN针镀金, S为PIN针镀锡  
 W后无0默认材质为V0  
 W后带2示意V2

Specifications:

Contact resistance: ≤30mΩ  
 Insulation resistance: ≥1000MΩ  
 Rated voltage: 250V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 1000V AC/minute  
 Temperature Range: -25°C ~ +85°C  
 Housing: LCP UL94V-0, BEIGE  
 Contacts: Brass/MATTE Sn-plated  
 Solder Tabs: Brass/MATTE Sn-plated

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

## 东莞市羿通实业有限公司

### DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2011WVS-2*NPX-B			一般公差 <b>GENERAL TOLERANCE</b> X.X ±0.30 X.XX ±0.20 ANGLE ±1°
品名 TITLE: PHB2.0-WAFER立贴(双排)			
材料:	单位: <b>MM</b>	包装规格:	比例: <b>1:1</b>
制图:	审核:	核准:	日期: <b>2022.6.18</b>