
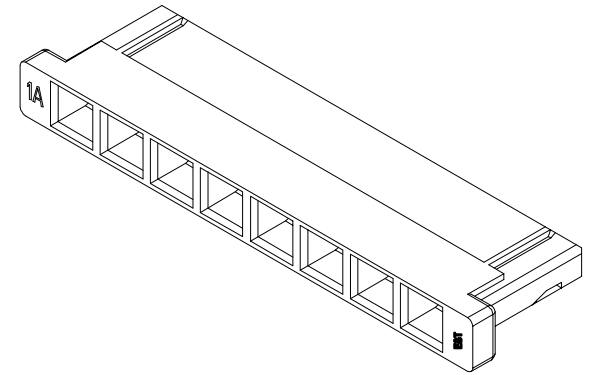


ASSEMBLY DRAWING
(SCALE 2:1)

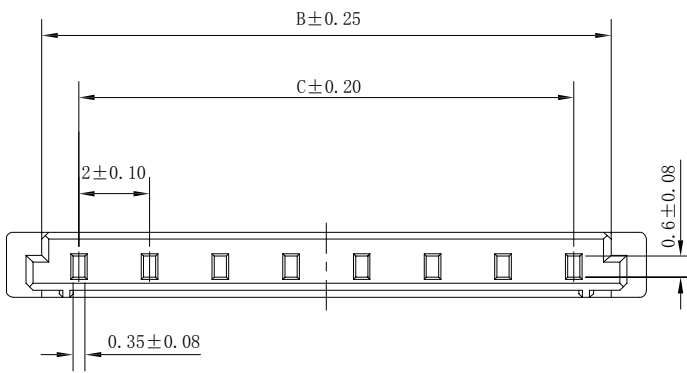

EST2015 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ X胶壳 ↑ NO MARK ↑ A灼热丝750

↑ B黑色 ↑ B带扣 ↑ G母胶壳 ↑ C刺破 ↑ 2L示意两侧带锁扣 ↑ HV带高凸点 ↑ B灼热丝850

↑ R红色 ↑ U超薄F防呆型 ↑ LC带低凸点 ↑ K卡槽 ↑ E有耳 ↑ HF示意无卤 ↑ NP普通含卤

↑ L蓝色 ↑ Y黄色 ↑ G绿色 ↑ C透明

1示意单排 2示意双排

H示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2

PIN	DIM A	DIM B	DIM C	DIM D
5	12.10	10.1	8.00	11.00
6	14.10	12.1	10.00	13.00
7	16.10	14.10	12.00	15.00
8	18.10	16.10	14.00	17.00
9	20.10	18.10	16.00	19.00
10	22.00	20.10	18.00	21.00

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2015-1*NPX-U-X

品名 TITLE: MX2.0-H(超薄)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022.06.18

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY