

13790510059



5

4



3

2

1

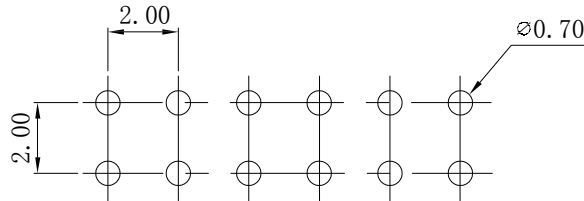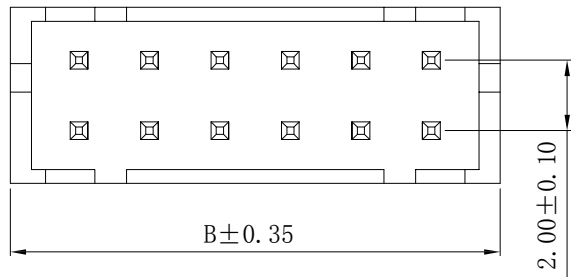

P. C. B LAYOUT

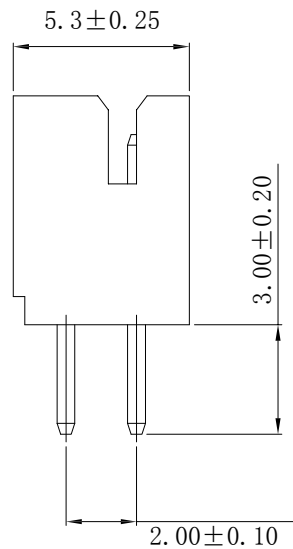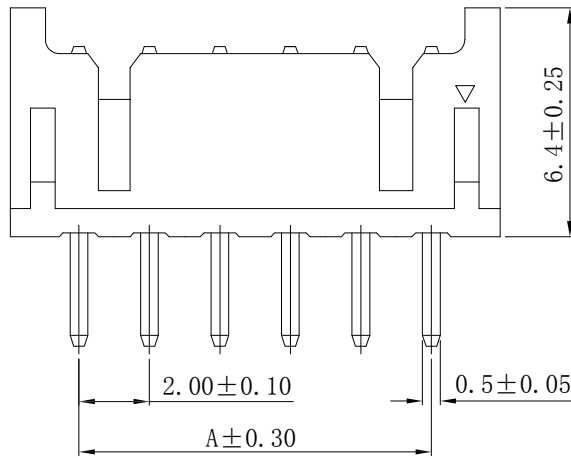

Poles	Dimension (mm)	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

EST2020 W V - 1\*NP X - X - X X - NK-HF

↑ 羿通代码+间距      ↑ 羿通针座  
 ↑ 羿通材料      ↑ 羿通默认材质为V0  
 ↑ 羿通2 羿通V2

↑ PIN数 X 本色 X 普通  
 1 单排 B 黑色 B 带扣  
 2 双排 R 红色 U 超薄  
 L 蓝色 PH 组合排针  
 Y 黄色 FH 组合排母  
 G 绿色 H 高弯  
 K 打脚 K  
 D 防呆型 LD 带定位无K  
 2 示意有柱 KLD 带定位打K  
 V 示意180°直针, VS 立式  
 R 示意90°弯针, RS 卧式  
 RG 高弯

↑ G 为PIN针镀金      ↑ HF 无菌  
 S 为PIN针镀锡      NF 普通含卤

NK 为NO MARK  
 MK 为有MARK

1 为PPS, 2 为PBT, 3 为LCP, 4 为ABS, 5 为PA6T,  
 6 为PA66

SPECIFICATIONS:

Current rating:3A AC DC Max.  
 Voltage rating:250V AC DC  
 Temperature range:-40°~+125°  
 Contact resistance:20m Ω Max  
 Insulation Resistance:1000M Ω Min  
 Withstanding Voltage: 800V AC/minute  
 Material:PA9T UL 94V-0(Grey)  
 Pin: Brass,Tin-plated



东莞市羿通实业有限公司  
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:EST2020wv-2\*NPX-X


品名 TITLE:DF11直针(双排)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2021. 6. 21

一般公差  
 GENERAL TOLERANCE  
 X.X ±0.30  
 X.XX ±0.25  
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



6

5

4

3

2

1

LP