

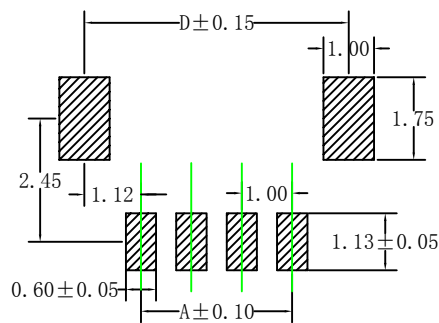



05~24P



PCB LAYOUT



02~04P

0.10±0.01



DETAIL "A"
SCALE 5:1

NOTES:

CURRENT RATING: 1A AC/DC
VOLTAGE RATING: 250V AC/DC
TEMPERATURE RANGE: -25°C~+85°C
CONTACT RESISTANCE: 20mΩ MAX
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTANDING VOLTAGE: 800V AC/MINUTE
FLASH: 0.05MAX; WARPAGE: 0.08MAX

EST1001 W VS - 1*NP X - X - 6S - NK-HF

↑ 普通代码+间距 ↑ PIN数 X本色 X普通 6S NK HF无齿
1单排 B蓝色 B带扣 U超薄 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66 NF普通含齿
2双排 R红色 L蓝色 Y黄色 G绿色 XG中的X示意尼龙料, 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66 NK为NO MARK MK为有MARK

V示意180°直针, VS立式
R示意90°弯针, RS卧式

W示意针座
W后无0默认材质为V0
W后带2示意V2

Circuit No.	Dimensions			
	A	B	C	D
02P	1.00	4.00	2.45	3.24
03P	2.00	5.00	3.45	4.24
04P	3.00	6.00	4.45	5.24
05P	4.00	7.00	5.45	6.24
06P	5.00	8.00	6.45	7.24
07P	6.00	9.00	7.45	8.24
08P	7.00	10.00	8.45	9.24
09P	8.00	11.00	9.45	10.24
10P	9.00	12.00	10.45	11.24
11P	10.00	13.00	11.45	12.24
12P	11.00	14.00	12.45	13.24
13P	12.00	15.00	13.45	14.24




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1001WVS-1*NPX-X-6S

品名 TITLE: SH1.0-Wafer 180°立式

材料: PA9T/LCP 单位: MM 包装规格: 1K/包 比例: 1:1
制图: 胡宗显 审核: 核准: 李海平 日期: 2022/04/12

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
X.XXX ±0.10
ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1