



\*2.43±0.25




SECTION: A-A  
SCALE 1:1

\*A±0.2



SECTION: B-B  
SCALE 1:1

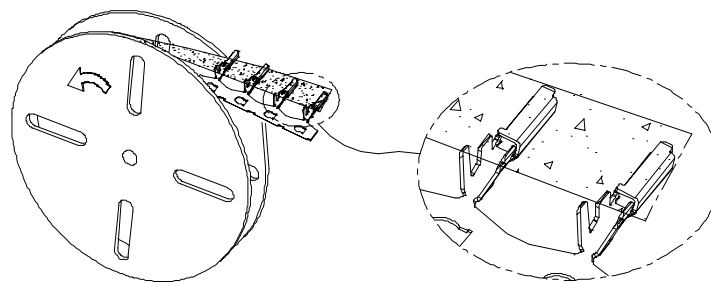


After Plating

SCALE 4:1

"A" "B" Important size

A	B
1.45	1.35
1.60	1.70

EST2024 T P X - 2 X- X

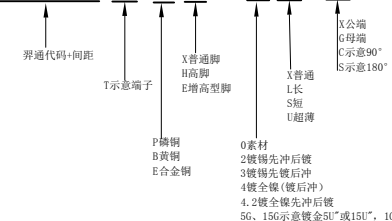

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2024TPX-2X-G

品名 TITLE: 2024-T

材料:

单位: MM

包装规格:

比例: 1:1

一般公差  
GENERAL TOLERANCE  
X.X ±0.30  
X.XX ±0.25  
ANGLE ±1°

日期版次  
REVISION

日期  
DATE

变更内容  
DESCRIPTION

核 准  
APPROVALBY

制图:

审核:

核准:

日期: 2021.10.20

