
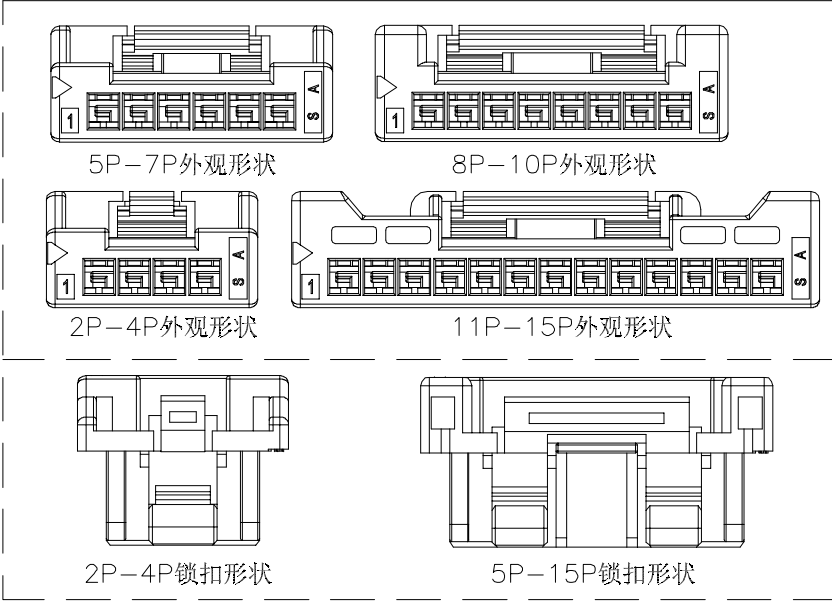


4.85(02Pin)  
4.60(03Pin~15Pin)

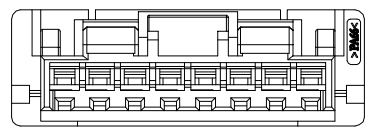

EST2024 H - 1\*NP X - B - X - HF-NK - X

↑ 羿通代码+间距    ↑ PIN数    ↑ X普通    ↑ X公胶壳    ↑ NO MARK    ↑ A灼热丝750  
 1示意单排    2示意双排    B黑色    C剥破    2L示意两侧带锁扣    B灼热丝850    X普通料  
 X本色    R红色    L蓝色    Y黄色    G绿色    C透明    H示意胶壳    H后无数字默认材质V0    H后带数字2示意材质V2    HF示意无卤    NP普通含卤    E有耳

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.70	09	16.00	22.00	18.70
03	4.00	10.00	6.70	10	18.00	24.00	20.70
04	6.00	12.00	8.70	11	20.00	26.00	22.70
05	8.00	14.00	10.70	12	22.00	28.00	24.70
06	10.00	16.00	12.70	13	24.00	30.00	26.70
07	12.00	18.00	14.70	14	26.00	32.00	28.70
08	14.00	20.00	16.70	15	28.00	34.00	30.70

- SPECIFICATIONS**
- Voltage rating: 250V AC/DC;
  - Current rating: 3A AC/DC;
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ Min
  - Temperature range: -25℃~+85℃
  - Contact resistance: 20mΩ Max



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2024H-1\*NPX-B-X

品名 TITLE: 2024-H带扣(公)

材料:    单位: MM    包装规格:    比例: 1:1

日期版次 REVISION    日期 DATE    变更内容 DESCRIPTION    核 准 APPROVALBY    制图:    审核:    核准:    日期: 2021.10.19

一般公差  
GENERAL TOLERANCE  
X.X ±0.25  
X.XX ±0.20  
ANGLE ±1°

