




PCB LAYOUT



7~9A



10~16A

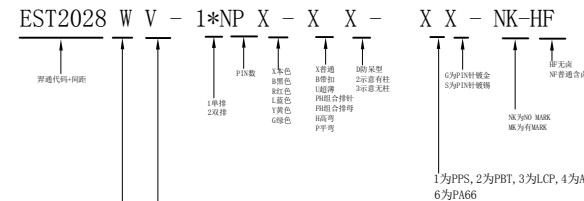

V示意180°直针, VS立式
R示意90°弯针, RS卧式

W示意针座
W后无0默认材质为V0
W后带2示意V2

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material: Wafer PA66, UL94V-0
PIN Brass Tin-plated

poles	尺寸 (mm)	
	A	B
1*2	2.00	8.00
1*3	4.00	10.00
1*4	6.00	12.00
1*5	8.00	14.00
1*6	10.00	16.00
1*7	12.00	18.00
1*8	14.00	20.00
1*9	16.00	22.00
1*10	18.00	24.00
1*11	20.00	26.00
1*12	22.00	28.00
1*16	30.00	36.00

Company Name :DONGGUAN EASTOM INDUSTRIAL CO.,LTD
Address :1/2 WORKSHOP BUILDING NO.53 LONGYAN NINTH ROAD ,HUMEI TOWN DONGGUAN GUANGDONG CHINA
Tell:13790510059

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2028WV-1*NPX-B

品名 TITLE: PA2.0Wafer 180° (有扣)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022. 3. 30

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

