

13790510059





5

4



3

2

1

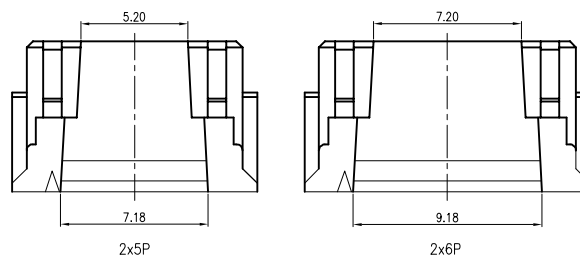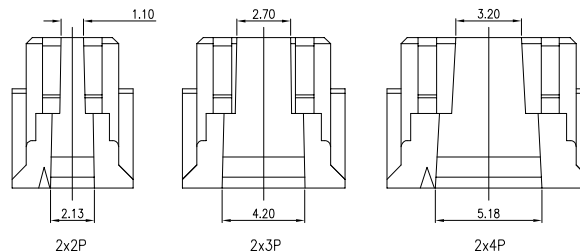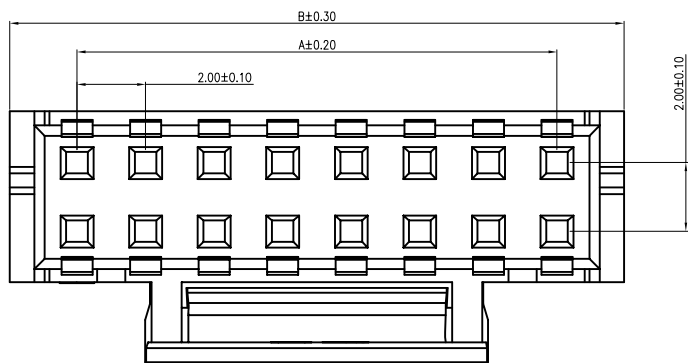

Poles	Dimension(mm)		
	A	B	C
2x2	2.00	6.00	4.60
2x3	4.00	8.00	6.60
2x4	6.00	10.00	8.60
2x5	8.00	12.00	10.60
2x6	10.00	14.00	12.60
2x7	12.00	16.00	14.60
2x8	14.00	18.00	16.60
2x9	16.00	20.00	18.60
2x10	18.00	22.00	20.60
2x11	20.00	24.00	22.60
2x12	22.00	26.00	24.60
2x13	24.00	28.00	26.60
2x14	26.00	30.00	28.60
2x15	28.00	32.00	30.60
2x16	30.00	34.00	32.60
2x17	32.00	36.00	34.60
2x18	34.00	38.00	36.60
2x19	36.00	40.00	38.60
2x20	38.00	42.00	40.60
2x21	40.00	44.00	42.60
2x22	42.00	46.00	44.60

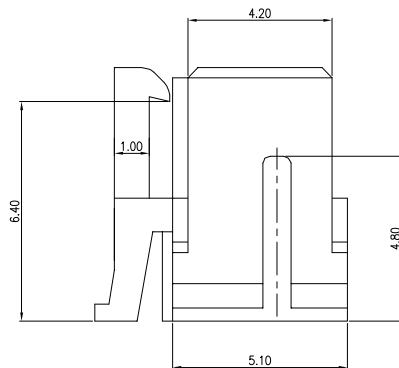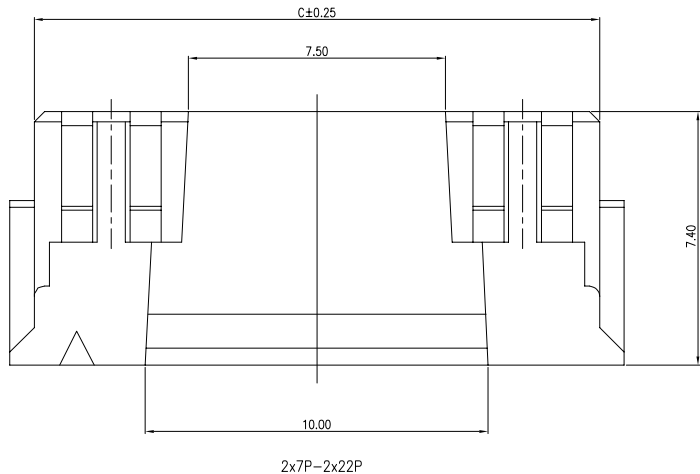

EST2029 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距 ↑ H 示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2

↑ PIN数 ↑ X 普通, X公胶壳

↑ B 带扣 ↑ C 刺破 ↑ G 母胶壳

↑ L 蓝色 ↑ U 短脚F的呆型 ↑ HV 带高凸点 ↑ NO MARK ↑ A 灼热丝750

↑ Y 黄色 ↑ LC 带低凸点 ↑ K 卡槽 ↑ B 灼热丝850

↑ C 透明 ↑ E 有耳 ↑ NF 普通含卤 ↑ X 普通料

↑ NE 无耳

1 示意单排 2 示意双排

NOTES:

1. Material: Nylon66, UL94V-0
2. Color: Natural(White)
3. Current Rating: 3A AC,DC
4. Voltage Rating: 250V AC,DC
5. Temperature Rang: -25°C~+85°C
6. Contact Resistance: 20mΩ Max
7. Insulation Resistance: 1000MΩ Min
8. Withstanding Voltage: 800V AC/minute

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2029H-1*NPX-B-X

品名 TITLE: PHC-H带扣

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022. 5. 13

一般公差 GENERAL TOLERANCE	X.X ±0.30
	X.XX ±0.25
ANGLE	±1°



XR