
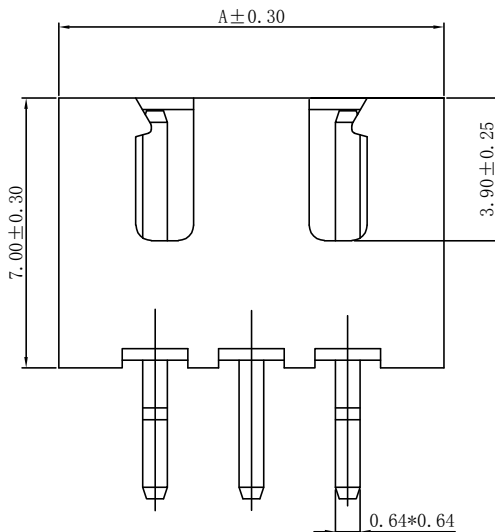
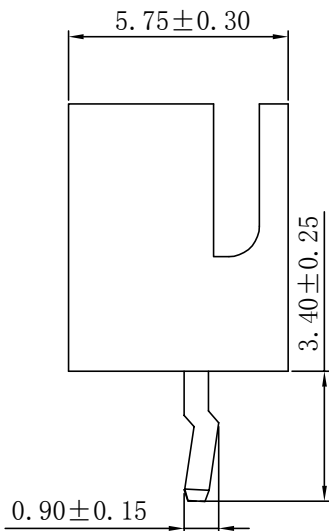
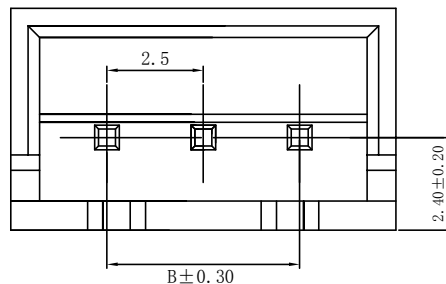


Recommended P.C.B Layout (Top Side)

P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

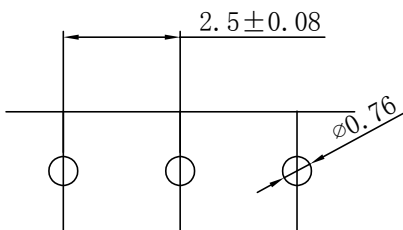

3P视图

EST2501 W V - 1*NP X - K - X X - NK-HF

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ G为PIN针镀金 ↑ HF无卤

↑ 1单排 ↑ B黑色 ↑ B带扣 ↑ S为PIN针镀锡 ↑ NF普通含卤

↑ 2双排 ↑ R红色 ↑ U超薄 ↑ PH组合排针 ↑ NK为NO MARK

↑ L蓝色 ↑ L蓝色 ↑ FH组合排母 ↑ H高弯 ↑ MK为有MARK

↑ Y黄色 ↑ K打脚K ↑ D防呆型 ↑ 2示意有柱 ↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ V示意180°直针, VS立式 ↑ R示意90°弯针, RS卧式 ↑ LG高弯 ↑ LO带定位无K ↑ KLO带定位打K

W示意针座
W后无0默认材质为V0
W后带2示意V2

Poles	Dimensions	
	A	B
1*2P	7.50	2.50
1*3P	10.00	5.00
1*4P	12.50	7.50
1*5P	15.00	10.00
1*6P	17.50	12.50
1*7P	20.00	15.00
1*8P	22.50	17.50
1*9P	25.00	20.00
1*10P	27.50	22.50
1*11P	30.00	25.00
1*12P	32.50	27.50
1*13P	35.00	30.00
1*14P	37.50	32.50
1*15P	40.00	35.00
1*16P	42.50	37.50

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +125°C
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501WV-1*NPX-K

品名TITLE: XH2.50直针(打K)

Material: Nylon 66. UL94V-0 Unit: MM Q'ty/bao: 1000pcs Scale: 1:1

DR: 李建 CHKD: 余刚 APPD: 李海平 DATE: 2022/07/02

GENERAL TOLERANCE
X.X ±0.15
X.XX ±0.05
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

