

13790510059

5





4

3

2

1

Pin	A	B
2	-	10.0
3	5.0	12.5
4	7.5	15.0
5	10.0	17.5
6	12.5	20.0
7	15.0	22.5
8	17.5	25.0
9	20.0	27.5
10	22.5	30.0
11	25.0	32.5
12	27.5	35.0
20	47.5	55.0

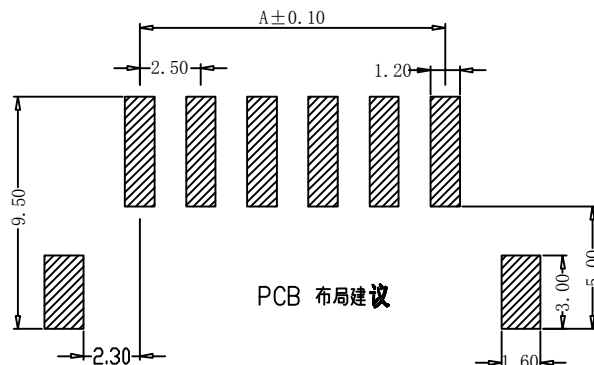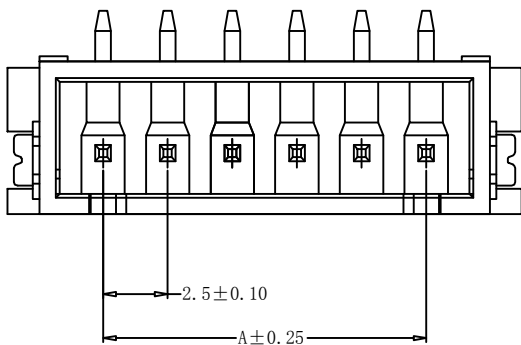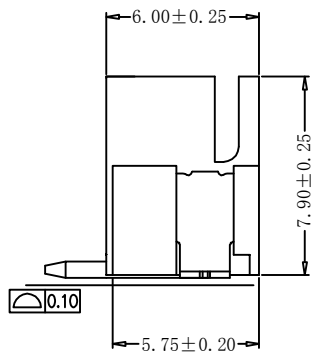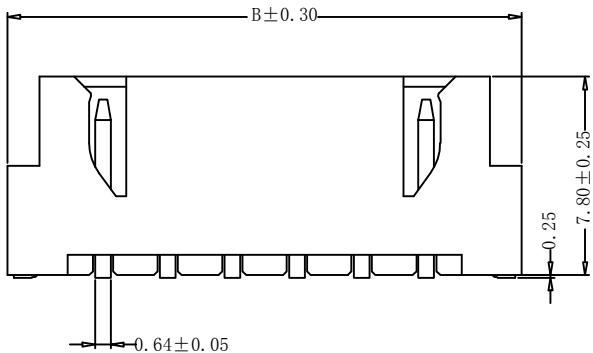

PCB 布局建议

EST2501 W V - 1*NP X - X - X X - NK-HF

弄通代码+间距
 1单排
 2双排
 PIN数
 X本色
 B蓝色
 R红色
 L蓝色
 Y黄色
 G绿色
 X普通
 B带扣
 U超薄
 PH组合排针
 FH组合排母
 H高弯
 K打脚K
 D防呆型
 2示意有柱
 LO带定位无K
 KLO带定位打K
 V示意180°直针, VS立式
 R示意90°弯针, RS卧式
 RG高弯
 W示意针座
 W后无0默认材质为V0
 W后带2示意V2
 G为PIN针镀金
 S为PIN针被锡
 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
 NK为NO MARK
 MK为有MARK
 HF无卤
 NF普通含卤

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:500V AC/minute
- Insulation resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Spacing:2.5mm



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501WVS-1*NPX-X


品名 TITLE: XH2.5立贴

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022.7.2

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY



6

5

4

3

2

1

ZT