

13790510059





5

4

3

2

1

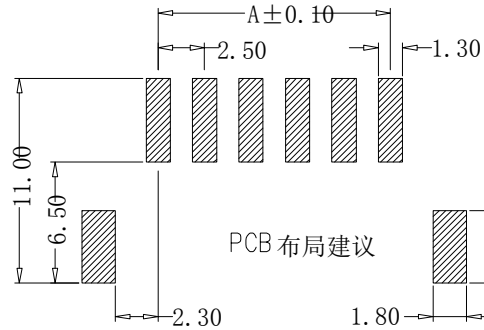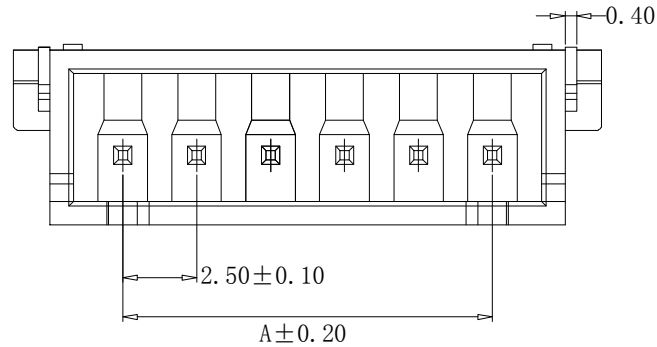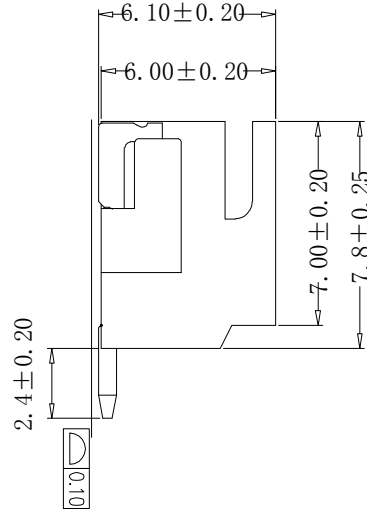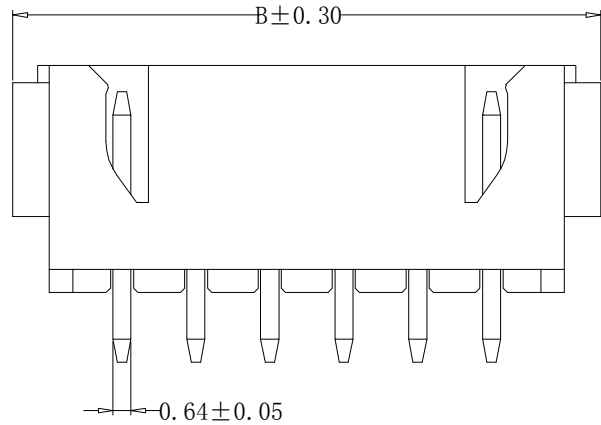

EST2501 W V - 1*NP X - X - X X - NK-HF

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ G为PIN针镀金 ↑ HF无齿 ↑ NF普通含齿

1单排 2双排 B黑色 R红色 L蓝色 Y黄色 G绿色 U超薄 PH组合排针 FH组合排母 H高弯 K打脚 D脚采型 2宗意有柱 L0带定位无K KLO带定位打K

1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

NK为NO MARK MK为有MARK

V示意180°直针, VS立式
R示意90°弯针, RS锯齿式
RG高弯

W示意针座
W后无0默认材质为V0
W后带2示意V2

| Pin | A | B |
|-----|------|------|
| 2 | - | 10.0 |
| 3 | 5.0 | 12.5 |
| 4 | 7.5 | 15.0 |
| 5 | 10.0 | 17.5 |
| 6 | 12.5 | 20.0 |
| 7 | 15.0 | 22.5 |
| 8 | 17.5 | 25.0 |
| 9 | 20.0 | 27.5 |
| 10 | 22.5 | 30.0 |
| 11 | 25.0 | 32.5 |
| 12 | 27.5 | 35.0 |
| 20 | 47.5 | 55.0 |

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000Ω Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Spacing: 2.5mm



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501WRS-1*NPX-X

品名 TITLE: XH2.5贴片

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022.7.2

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVALBY |
|------------------|------------|---------------------|-------------------|
| | | | |
| | | | |
| | | | |



6

5

4

3

2

1

ZT