

13790510059

5

4

3

2

1

EST2501 W RS - 1*NP X - B - 3G - NK-HF

↑ 羿通代码+间距

↑ PIN数

1单排

2双排

↑ X本色

B黑色

R红色

L蓝色

Y黄色

G绿色

↑ X普通

B带扣

U超薄

PH组合排针

FH组合排母

↑ HF无卤

NF普通含卤






NK为NO MARK

MK为有MARK


XG中的X示意尼龙料,
1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T,
6为PA66

G示意PIN针镀金, S为PIN针镀锡

V示意针座
W后无0默认材质为V0
W后带2示意V2

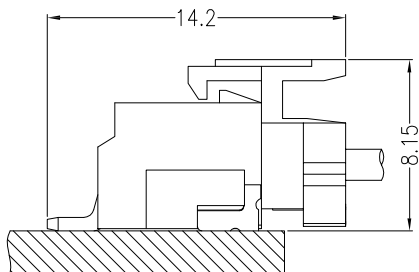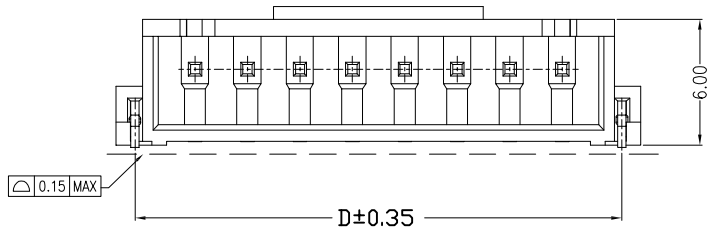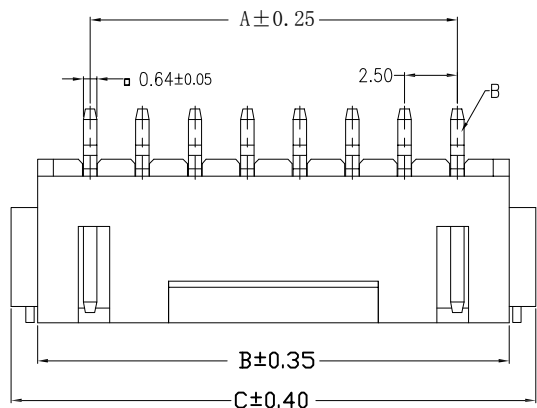


Assembly Layout

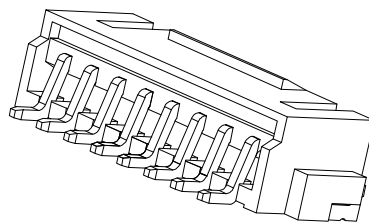

Circuit	Dimensions (mm)			
	DIM. A	DIM. B	DIM. C	DIM. D
02	2.50	7.50	10.00	8.20
03	5.00	10.00	12.50	10.70
04	7.50	12.50	15.00	13.20
05	10.00	15.00	17.50	15.70
06	12.50	17.50	20.00	18.20
07	15.00	20.00	22.50	20.70
08	17.50	22.50	25.00	23.20
09	20.00	25.00	27.50	25.70
10	22.50	27.50	30.00	28.20
11	25.00	30.00	32.50	30.70
12	27.50	32.50	35.00	33.20
13	30.00	35.00	37.50	35.70
14	32.50	37.50	40.00	38.20
15	35.00	40.00	42.50	40.70
16	37.50	42.50	45.00	43.20

技术参数:
 间距: 2.5
 线数: 02 TO 15
 温度范围: -40℃~+110℃
 额定电压: 250V AC/DC
 额定电流: 3.0A AC/DC
 接触电阻: 20mΩ
 绝缘电阻: 1000mΩ
 耐压: 500V AC/Minute
 接触电阻: ≤20MΩ

C	SOLDERTAB	2 PCS	Brass	Sn-plated
B	CONTACT	2~16 PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
TEM		Q'TY	MATERIAL	FINISH

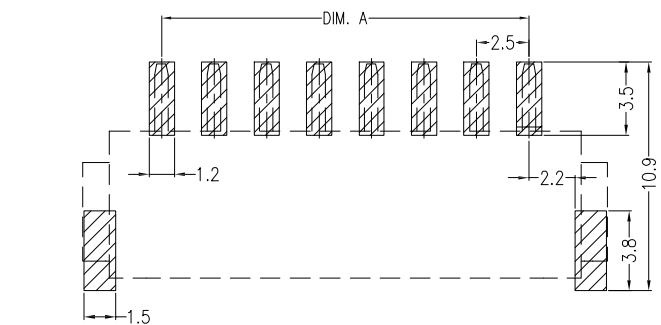

SUGGESTED PCB LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Spacing: 2.5mm

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY




东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501WRS-1*NPX-B

品名 TITLE: XH2.5贴片(带扣)

材料: 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2022.7.2

一般公差
GENERAL TOLERANCE
 X.X ±0.30
 X.XX ±0.20
 ANGLE ±1°



6

5

4

3

2

1

ZT