






13790510059

5




4

3

2

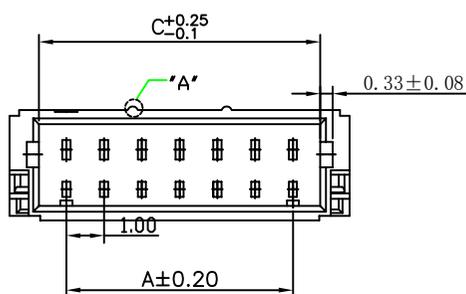


NOTES:
 CURRENT RATING: 1A AC/DC
 VOLTAGE RATING: 100V AC/DC
 TEMPERATURE RANGE: -25°C~+85°C
 CONTACT RESISTANCE: 20mΩ MAX
 INSULATION RESISTANCE:1000MΩ MIN
 WITHSTANDING VOLTAGE:800V AC/MINUTE
 FLASH: 0.05MAX;WARPAGE: 0.08MAX
 10Pin以上有“A”,10Pin以下没有“A”
 PIN:TIN BRASS;
 SHELL:PA9T

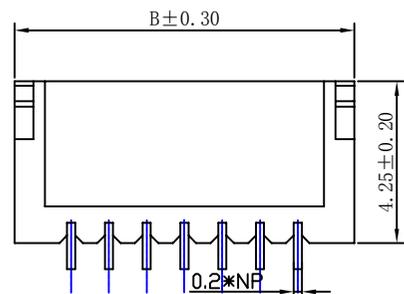

02~04P

05~24P

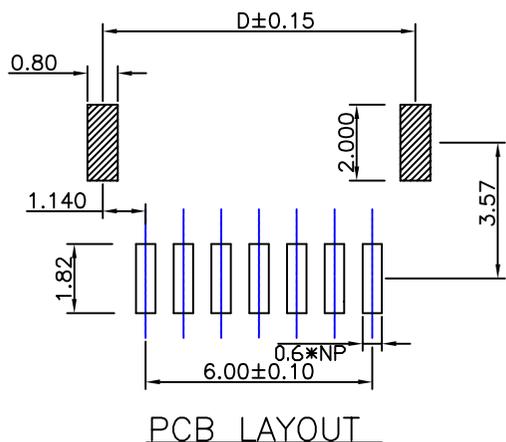

EST1001 W RS - 1*NP X - X - 6S - NK-HF

↑ 羿通代码+间距

↑ PIN数

1 单排

2 双排

X 插孔 B 插孔

R 红色 L 蓝色 Y 黄色 G 绿色

U 插脚 PH 插脚 FH 插脚

↑ 6S

↑ NK 插脚 MARK

↑ HF 无插脚 NF 插脚

XG 中轴 X 插脚

1#PPS, 2#BT, 3#LP, 4#ABS, 5#PA6T, 6#PA66, 7#PA9T

G 插脚 PIN 插脚, S 插脚 PIN 插脚

V 示插脚 80° 斜角, VS 示插脚 90° 斜角, RS 示插脚

W 示插脚

W 示插脚 插脚插脚 V0

W 示插脚 插脚插脚 V2

Circuit No.	Dimensions			
	A	B	C	D
02P	1.00	4.00	2.45	2.25
03P	2.00	5.00	3.45	3.25
04P	3.00	6.00	4.45	4.25
05P	4.00	7.00	5.45	5.25
06P	5.00	8.00	6.45	6.25
07P	6.00	9.00	7.45	7.25
08P	7.00	10.00	8.45	8.25
09P	8.00	11.00	9.45	9.25
10P	9.00	12.00	10.45	10.25
11P	10.00	13.00	11.45	11.25
12P	11.00	14.00	12.45	12.25
13P	12.00	15.00	13.45	13.25
14P	13.00	16.00	14.45	14.25
15P	14.00	17.00	15.45	15.25
16P	15.00	18.00	16.45	16.25
17P	16.00	19.00	17.45	17.25
18P	17.00	20.00	18.45	18.25
19P	18.00	21.00	19.45	19.25
20P	19.00	22.00	20.45	20.25
24P	23.00	26.00	24.45	21.25

Notes:
 1.毛刺 不超过0.08mm(max.),外毛刺不超过0.25MM
 2.DIM. B公差-->02P~05P±0.10
 06P~10P±0.15
 11P~20P±0.25



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1001WRS-1*NPX-X-6S

品名 TITLE: SH1.0-Wafer 贴片式

材料: PIN(Brass)
Shell(PA9T)

单位: MM

包装规格: 1K/卷

比例: 1:1


制图:

审核:

核准:

日期: 2022/7/8

一般公差
 GENERAL TOLERANCE
 X.X ±0.15
 X.XX ±0.10
 X.XXX ±0.05
 ANGLE ±1°



日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY