

5

4

3

2

F

F

E

E

D

C

B

A

A

6

5



4

3


2

1

EST

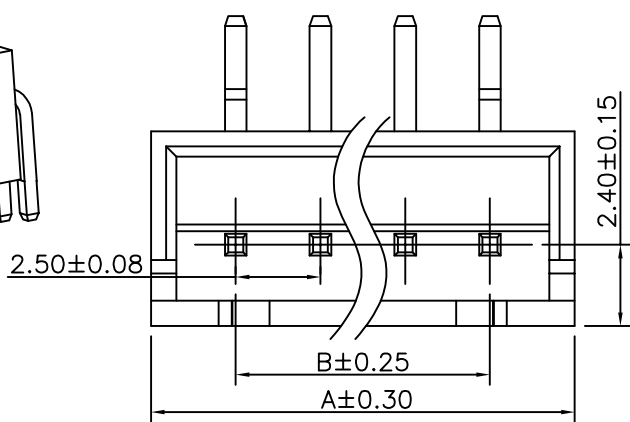

Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

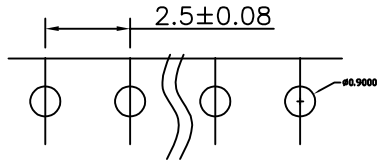

EST2501 W R - 1*NP X - X - X X - NK-HF

↑ 界限代码↑间距

1 单排
2 双排




PIN 取文 本色 X 普通
D 蓝色 U 超薄
R 红色 L 蓝色 PH 组合排针
Y 黄色 PM 组合排母
G 绿色 H 高弯
K 打眼K
D 防呆器
2 示意有柱
LD 带定位孔K
KLD 带定位打K

1 5 PPS,2 PBT,3 LCP,4 ABS,5 PA6T,
6 PA66

HF 无齿
NF 普通齿角

NK 无NO MARK
HK 有NO MARK


▽ 示意针座
▽ 后50 示意材料为V0
▽ 后位2 示意V2

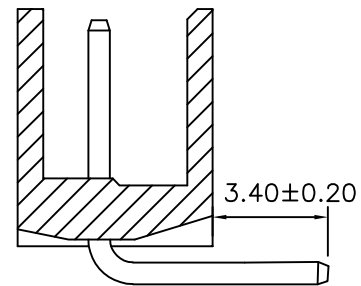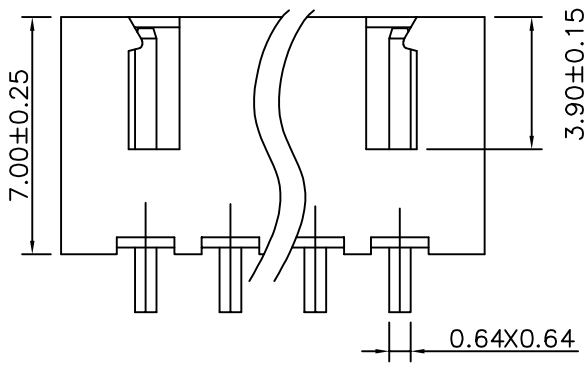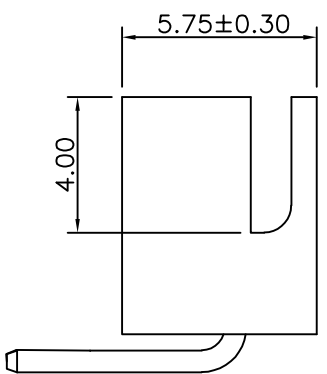

PART NO. (90°)	Dimensions	
	A	B
2P	7.50	2.50
3P	10.00	5.00
4P	12.50	7.50
5P	15.00	10.00
6P	17.50	12.50
7P	20.00	15.00
8P	22.50	17.50
9P	25.00	20.00
10P	27.50	22.50
11P	30.00	25.00
12P	32.50	27.50
13P	35.00	30.00
14P	37.50	32.50
15P	40.00	35.00
16P	42.50	37.50

- SPECIFICATIONS
- Voltage rating:250V AC/DC;
 - Current rating:3A AC/DC;
 - Withstanding Voltage:800V AC/minute
 - Insulation resistance:1000MΩ Min
 - Temperature range:-25℃~+85℃
 - Contact resistance:20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司


DONGGUAN EASTOM ELECTRONIC Co., Ltd.

PART NO: EST2501WR-1*NPX-X

TITLE: XH2.5弯针 (不带定位无K)

Material: Nylon 66,UL94V-0	Unit: MM	Q' ty/bao: 1000pcs	Scale: 1:1
DR: LI	CHKD: LI	APPD: LI	DATE: 2022/7/2

GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST