


Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

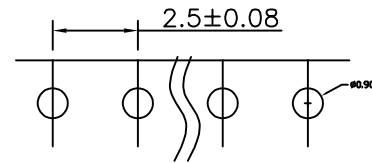

EST2501 WR - 1*NPX - K - XX - NK-HF

↑ 弯通代码↑ 弯通

↑ PIN 颜色: X 本色, Y 蓝色, L 红色, G 绿色

↑ 1 单排, 2 双排

↑ X 弯通, U 短焊, PH 组合排针, FH 组合排母, W 弯通




↑ K 打眼, D 防呆型, 2 不穿焊柱

↑ 1 PPS, 2 PBT, 3 LCP, 4 ABS, 5 PA6T, 6 PA66

↑ G/PIN 针镀金, S/PIN 针镀锡, NK/NK MARK, NF 普通含铜, NF 普通含铜

↓ V 示180°弯针, VS 立式, R 示90°弯针, RS 卧式, RG 高弯

↓ V 示意针座, V 示X轴材料为V0, V 示意V2

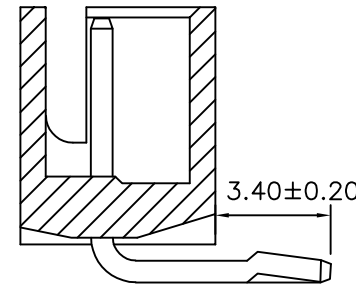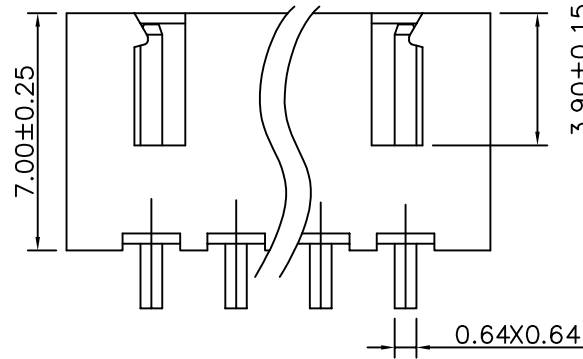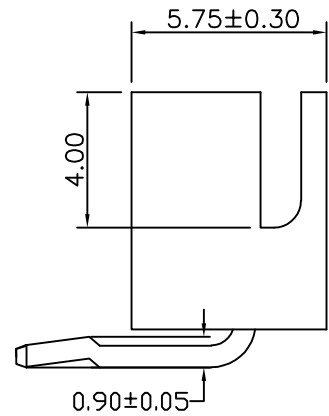

PART NO. (90°)	Dimensions	
	A	B
2P	7.50	2.50
3P	10.00	5.00
4P	12.50	7.50
5P	15.00	10.00
6P	17.50	12.50
7P	20.00	15.00
8P	22.50	17.50
9P	25.00	20.00
10P	27.50	22.50
11P	30.00	25.00
12P	32.50	27.50
13P	35.00	30.00
14P	37.50	32.50
15P	40.00	35.00
16P	42.50	37.50

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

EST DGEASTOM **东莞市羿通实业有限公司**
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

PART NO: EST2501WR-1*NPX-K

TITLE: XH2.50弯针打K

Material: Nylon 66, UL94V-0 Unit: MM Q'ty/bao: 1000pcs Scale: 1:1

DR: LI CHKD: LI APPD: LI DATE: 2012/07/02

GENERAL TOLERANCE
X.X ±0.15
X.XX ±0.05
ANGLE ±1°