





EST2502 H - 1*NP X - X - X - HF-NK - X

↑ 异通代码+间距 ↑ PIN数 ↑ X普通 ↑ X公胶壳 ↑ NO MARK ↑ A灼热丝750
 ↑ 1示意单排 ↑ X本色 ↑ B带扣 ↑ G母胶壳 ↑ B灼热丝850
 ↑ 2示意双排 ↑ R棕色 ↑ C刺破 ↑ 2L示意两侧带锁扣 ↑ 带点 ↑ X普通料
 ↑ L蓝色 ↑ U超薄F向呆型 ↑ H带高凸点 ↑ 带点 ↑ X普通料
 ↑ Y黄色 ↑ H带高凸点 ↑ L带高凸点 ↑ 带点 ↑ X普通料
 ↑ G绿色 ↑ H带高凸点 ↑ L带高凸点 ↑ 带点 ↑ X普通料
 ↑ C透明 ↑ H带高凸点 ↑ L带高凸点 ↑ 带点 ↑ X普通料

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

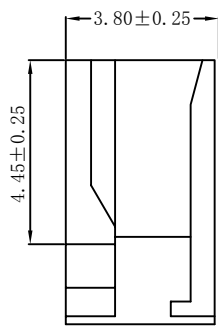


SEC:A-A

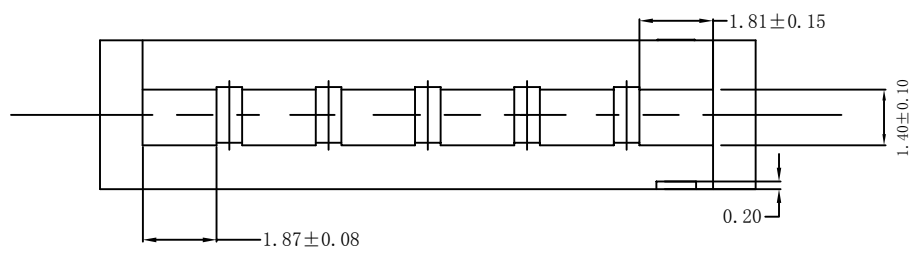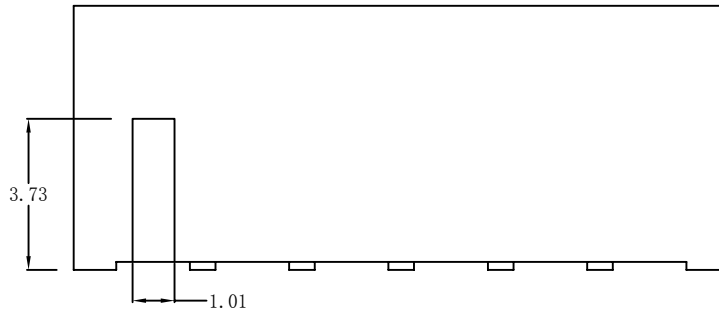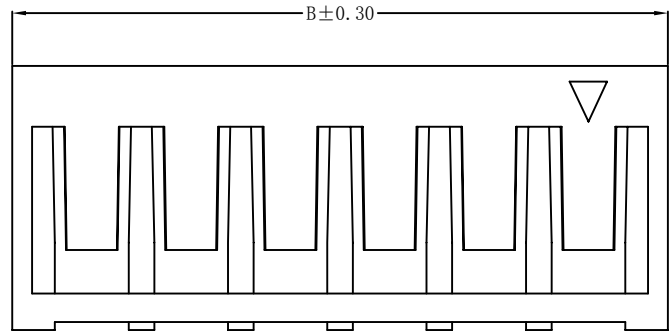

P NO.	Dimensions	
	A	B
2P	2.50	6.50
3P	5.00	9.00
4P	7.50	11.50
5P	10.00	14.00
6P	12.50	16.50
7P	15.00	19.00
8P	17.50	21.50
9P	20.00	24.00
10P	22.50	26.50
11P	25.00	29.00
12P	27.50	31.50
13P	30.00	34.00
14P	32.50	36.50
15P	35.00	39.00
16P	37.50	41.50

- SPECIFICATIONS
- Voltage rating: 250V AC/DC;
 - Current rating: 2.5A AC/DC;
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25°C ~ +85°C
 - Contact resistance: 20mΩ Max
 - Applicable wire: #24~#28

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2502H-1*NPX-X-X

品名 TITLE: SCN180°-H

材料: PA66	单位: MM	包装规格: 1K/包	比例: 1:1
制图:	审核:	核准:	日期: 2022/7/3

一般公差
GENERAL TOLERANCE

X.X ±0.30
X.XX ±0.20
X.XXX ±0.08
ANGLE ±1°