




13790510059

5

4



3

2

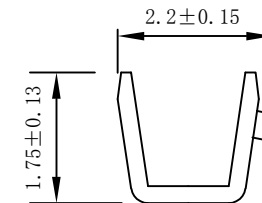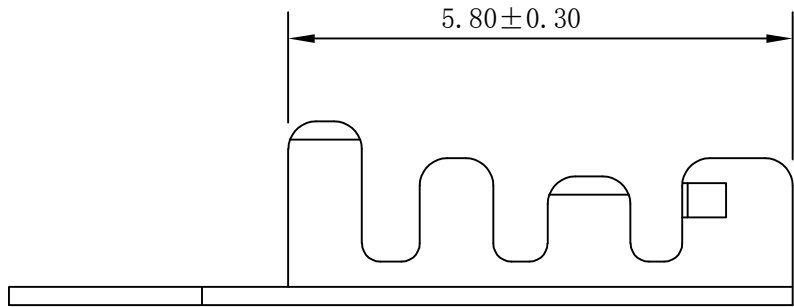


a-a SECTION

d-d SECTION

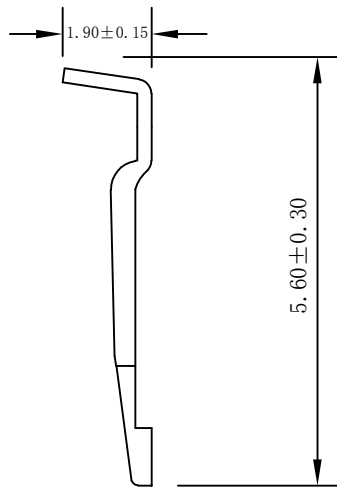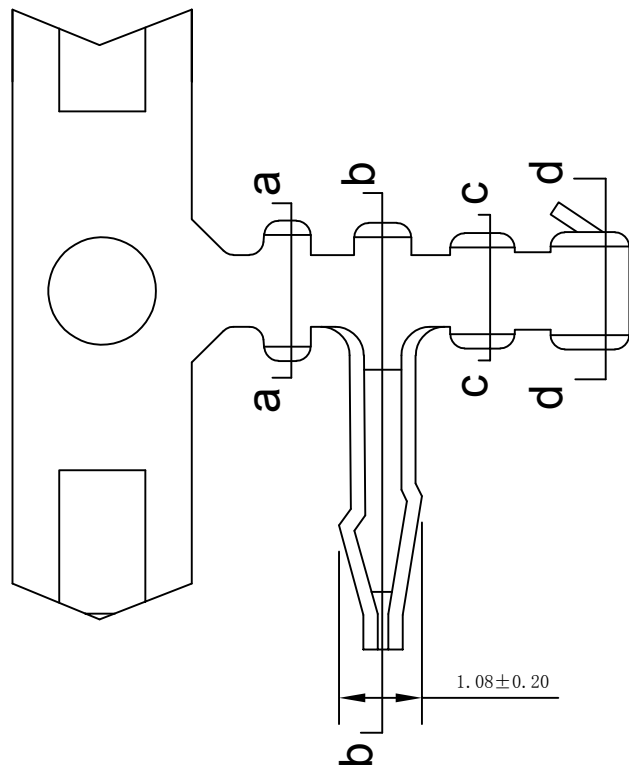

b-b SECTION



c-c SECTION

EST2503 T P X - 2 X - X

公司代码+间距 T示意端子 P磷铜 X普通脚 X公端 X普通 G母端

0素材 2镀锡先冲后镀 3镀锡先镀后冲 5G、15G示意镀金5U"或15U", 1G示意镀金1U"

H高脚

P磷铜
B黄铜
E合金铜

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Applicable wire: AWG26~#28

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2503TBX-2X-X

品名 TITLE: SCN-90° -T

材料: C2680/C5191 单位: MM 包装规格: 10K/卷 比例: 1:1

制图: 审核: 核准: 日期: 2022/7/2

一般公差
GENERAL TOLERANCE
X.X ±0.20
X.XX ±0.10
ANGLE ±5°



EST