

13790510059

5

4

3

2

F

E

D

C

B

A

F





E

D



C

B

A

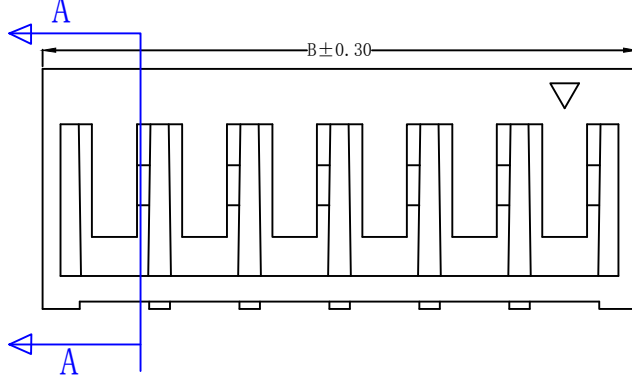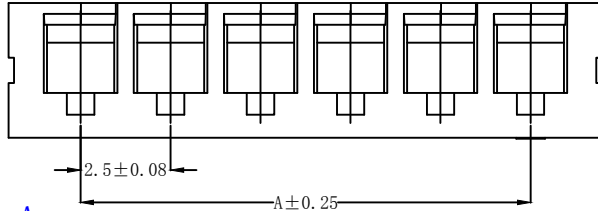

A-A

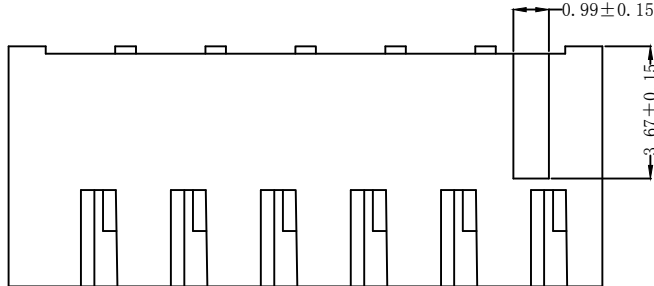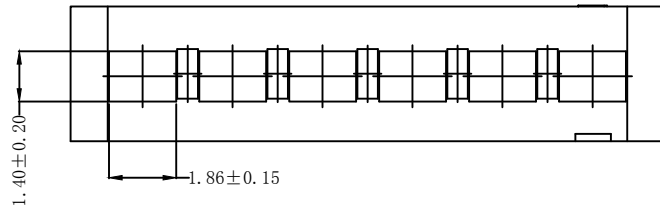

EST2503 H - 1\*NP X - X - X - HF-NK - X

↑  
羿通代码+间距

↑  
H 示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

↑  
1 示意单排  
2 示意双排

↑  
PIN数

↑  
X 本色  
B 黑色  
R 红色  
L 蓝色  
Y 黄色  
G 绿色  
C 透明


↑  
X 公胶壳  
G 母胶壳

↑  
NO MARK

↑  
HF 示意无卤  
NF 普通含卤

↑  
A 灼热丝750  
B 灼热丝850  
X 普通料

P NO.	Dimensions	
	A	B
2P	2.50	6.50
3P	5.00	9.00
4P	7.50	11.50
5P	10.00	14.00
6P	12.50	16.50
7P	15.00	19.00
8P	17.50	21.50
9P	20.00	24.00
10P	22.50	26.50
11P	25.00	29.00
12P	27.50	31.50
13P	30.00	34.00
14P	32.50	36.50
15P	35.00	39.00
16P	37.50	41.50

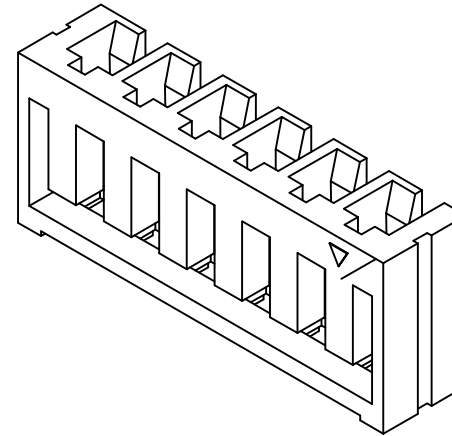

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max
- Applicable wire: AWG26~#28


日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL BY



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2503H-1*NPX-X-X			
品名 TITLE: SCN90 -H			
材料: PA66	单位: MM	包装规格: 1K/包	比例: 1:1
制图:	审核:	核准:	日期: 2020/7/2

一般公差  
GENERAL TOLERANCE  
X.X ±0.30  
X.XX ±0.20  
ANGLE ±1°



EST