

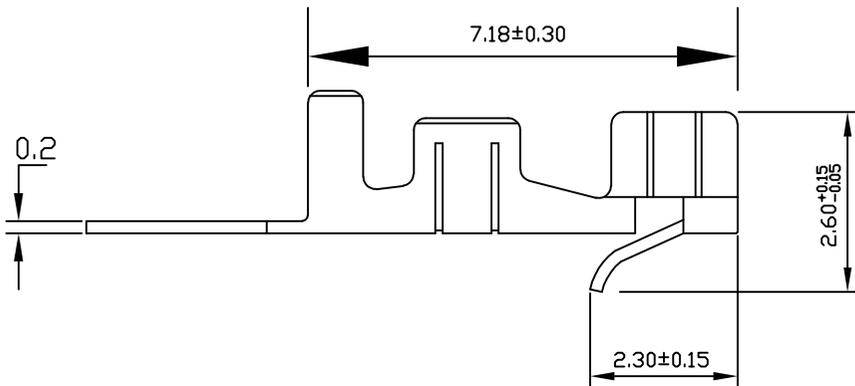


SECTION A-A



SECTION B-B

EST2505 T P X - 2 X - G

↑ 羿通代码+间距      ↑ T 示意端子      ↑ X 普通脚      ↑ H 高脚      ↑ X 普通      ↑ L 长      ↑ S 短      ↑ X 公端      ↑ G 母端      ↑ C 示意90°      ↑ S 示意180°

0 素材  
2 镀锡先冲后镀  
3 镀锡先镀后冲  
5G、15G 示意镀金5U' 或15U',  
1G 示意镀金1U'

P 磷铜  
B 黄铜  
E 合金铜

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 2.5A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2505TPX-2X-G

品名 TITLE: 5264-T

材料: C5191

单位: MM

包装规格: 10K/卷

比例: 1:1

一般公差  
GENERAL TOLERANCE  
X.X ±0.30  
X.XX ±0.15  
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

制图:

审核:

核准:

日期: 2022/7/2

