



EST2508 H - 1\*NP X - X - X - HF-NK - X

↑ 羿通代码+间距    ↑ PIN数    ↑ X公胶壳    ↑ G母胶壳    ↑ NO MARK    ↑ A灼热丝750    ↑ B灼热丝850    ↑ X普通料

X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

X普通  
B带扣  
C剥破  
2L示意两侧带锁扣  
U超薄防呆型  
HV带高凸点  
LC带低凸点  
K卡槽  
E有耳

H示意胶壳  
H后无数字默认材质V0  
H后带数字2示意材质V2

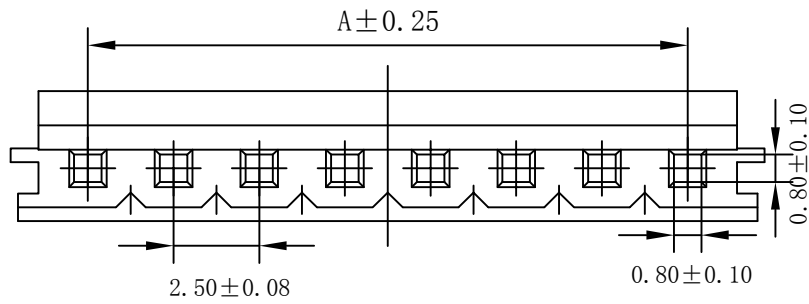

POLES	DIMENSION (MM)	
	A	B
2	2.50	7.00
3	5.00	9.50
4	7.50	12.00
5	10.00	14.50
6	12.50	17.00
7	15.00	19.50
8	17.50	22.00
9	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50
16	37.50	42.00

- SPECIFICATIONS**
- Voltage rating: 250V DC/AC (rms)
  - Current rating: 2A
  - Withstand voltage: 800V AC(rms)
  - Working Temperature: -25°C +85°C
  - Insulation resistance: ≥1000MΩ
  - Contact resistance: ≤0.02Ω

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



## 东莞市羿通实业有限公司

### DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2508H-1\*NPX-X-X

品名 TITLE: EH2.5-H

材料: Nylon 66    单位: MM    包装规格: 1K/包    比例: 1:1

制图:    审核:    核准:    日期: 2022/7/3

一般公差  
GENERAL TOLERANCE  
X.X ±0.35  
X.XX ±0.25  
X.XXX ±0.05  
±1°