


SECTION A---A

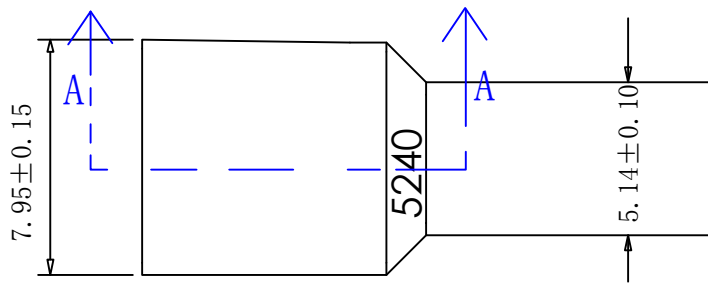

Poles	dimensions mm		
	A	B	C
2	2.5	8.67	5.85
3	5.0	11.17	8.35
4	7.5	13.67	10.85

EST2509 H - 1*NP X - X - G - HF-NK - X

- ↑ 羿通代码+间距
- ↑ PIN数
- ↑ X普通
- ↑ X胶壳
- ↑ G母胶壳
- ↑ NO MARK
- ↑ A灼热丝750
- ↑ B灼热丝850
- ↑ X普通料
- ↑ H示意胶壳
- ↑ H后无数字默认材质V0
- ↑ H后带数字2示意材质V2
- ↑ X本色
- ↑ B黑色
- ↑ R红色
- ↑ L蓝色
- ↑ Y黄色
- ↑ G绿色
- ↑ C透明
- ↑ B带扣
- ↑ C刺破
- ↑ 2L示意两侧带锁扣
- ↑ U超薄防呆型
- ↑ HV带高凸点
- ↑ LC带低凸点
- ↑ K卡槽
- ↑ E有耳
- ↑ HF示意无卤
- ↑ NF普通含卤

PRODUCT SPECIFICATON

1. Material: PA66 94-V0
2. Temperature range: -25°C ~ 85°C
3. Current rating: 2A AC/DC
4. Contact resistance: 10mΩ MAX
5. Insulation resistance: 1000MΩ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: AWG #28 TO #22



东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509H-1*NPB-X-G

品名 TITLE: 5240-H母

材料: PA66

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022/7/2

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

一般公差 GENERAL TOLERANCE	≤10 ±0.20
10~30 ±0.35	
ANGLE ±1°	

