

F

E

D

C

B

A

F



E

D


C

B


A

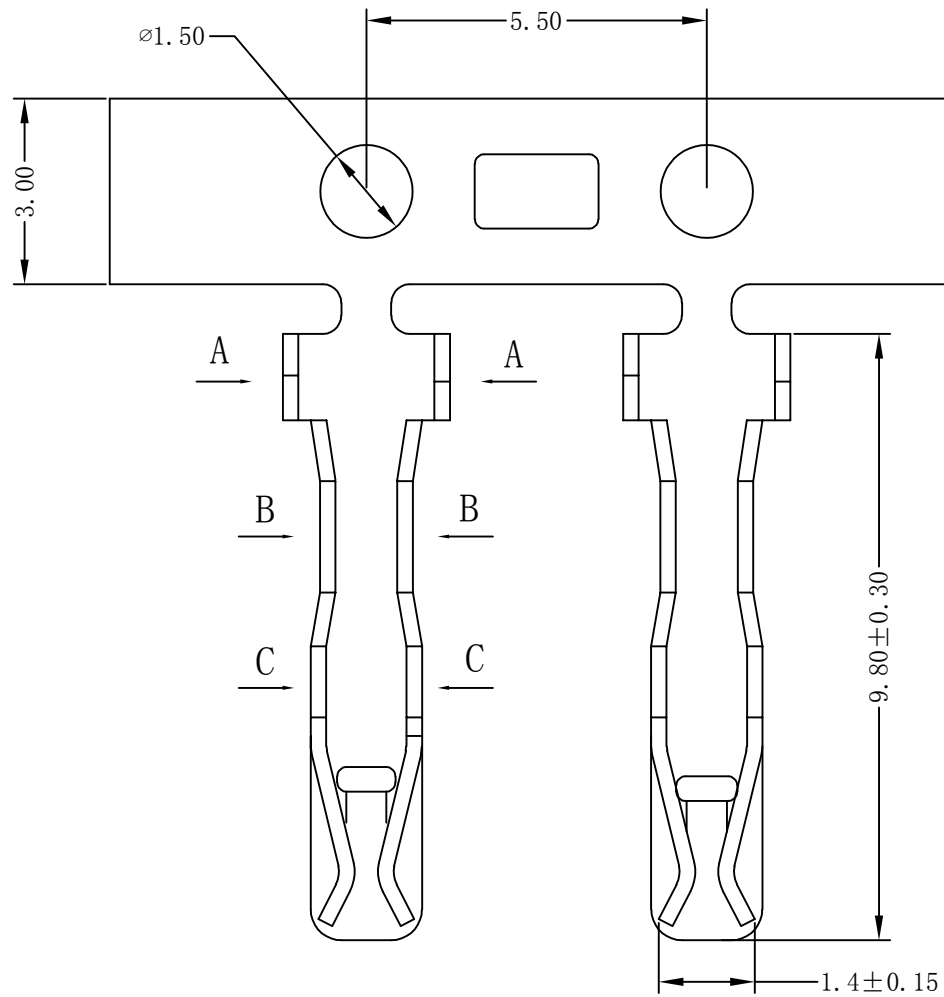


SECTION A--A



SECTION C--C



SECTION B--B

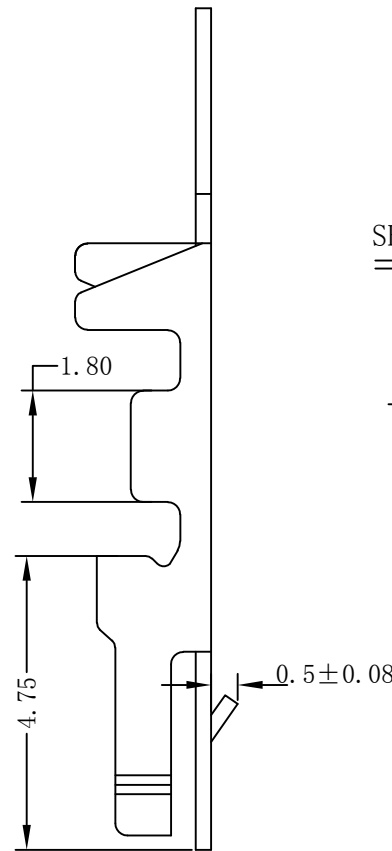

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 30mΩ Max
- Applicable wire size: AWG#22~#30



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2516TPX-2X-G

品名 TITLE: XHD2.5-T

材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022/7/2

一般公差 GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVAL BY

