

13790510059






5

4

3

2

1

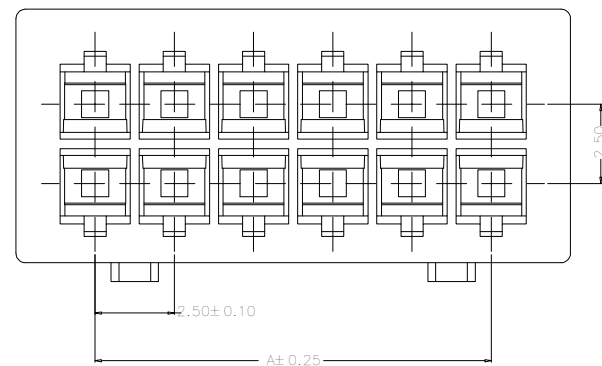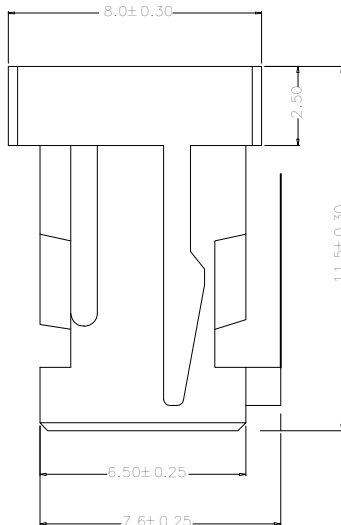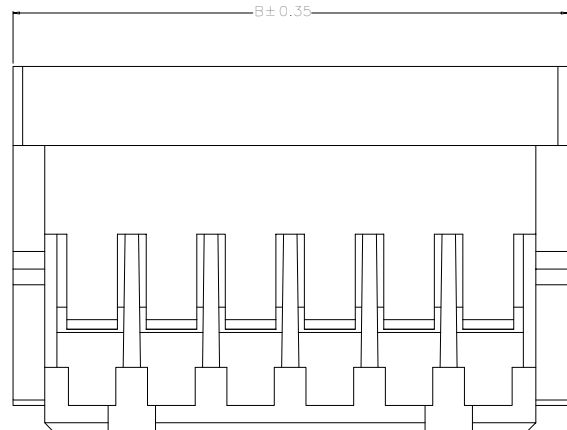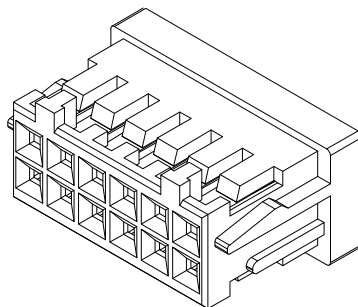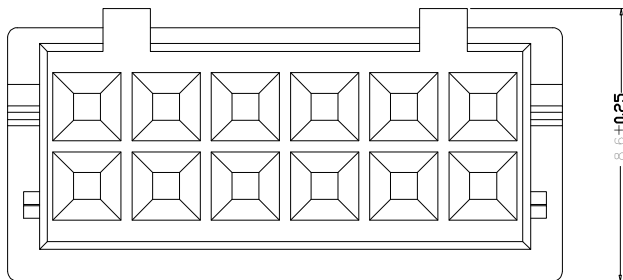

- SPECIFICATIONS
- Voltage rating: 250V AC/DC;
  - Current rating: 3A AC/DC;
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ Min
  - Temperature range: -25℃~+85℃
  - Contact resistance: 30mΩ Max
  - Applicable wire size: AWG#22~#30

EST2516 H - 1\*NP X - X - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数  
1示意单排  
2示意双排

↑ X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

↑ X普通  
B带扣  
C制破  
2L示意两侧带锁扣  
L超薄F架型  
HF带高凸点  
LC带低凸点  
K卡槽  
E有耳

↑ X公胶壳  
G母胶壳

↑ NO MARK

↑ A灼热丝750  
B灼热丝850  
X普通料

↑ H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

PIN数	尺寸 (mm)	
	A	B
2*02	2.50	7.50
2*03	5.00	10.00
2*04	7.50	12.50
2*05	10.00	15.00
2*06	12.50	17.50
2*07	15.00	20.00
2*08	17.50	22.50
2*09	20.00	25.00
2*10	22.50	27.50
2*11	25.00	30.00
2*12	27.50	32.50
2*20	47.50	52.50



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2516H-2\*NPX-X-X

品名 TITLE: XHD2.5-H

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022/7/2

一般公差  
GENERAL TOLERANCE  
X.X ±0.35  
X.XX ±0.20  
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

EST