



Poles	Dimensions/mm		Poles	Dimensions/mm	
	A	B		A	B
2	2.50	7.20	9	20.00	24.70
3	5.00	9.70	10	22.50	27.20
4	7.50	12.20	11	25.00	29.70
5	10.00	14.70	12	27.50	32.20
6	12.50	17.20	13	30.00	34.70
7	15.00	19.70	14	32.50	37.20
8	17.50	22.20	15	35.00	39.70


A VIEW

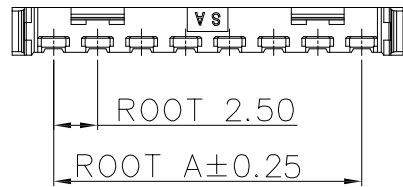


EST2519 H - 1*NP X - X - X - HF-NK - X

羿通代码+间距
 H 示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2
 1*NP 1示意单排, 2示意双排
 X 本色, X公胶壳, X母胶壳
 B 黑色, B带扣, C刺破, 2L示意两侧带锁扣
 R 红色, U超薄
 L 蓝色, F防呆型
 Y 黄色, HV带高凸点
 G 绿色, LC带低凸点
 C 透明, K卡槽, E有耳
 NO MARK
 A灼热丝750, B灼热丝850, X普通料
 HF示意无卤, NF普通含卤

A VIEW

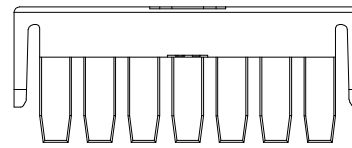

2~7P

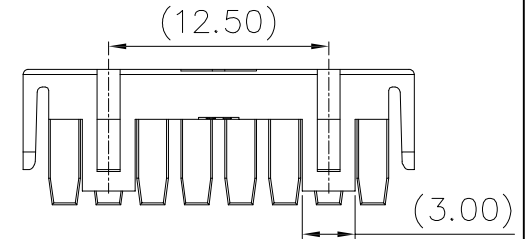

8~15P

- Specifications:
- Voltage rating: 250V Max AC/DC
 - Current rating: 3.5A AC/DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -25°C~+ 85°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ
 - Product Specification:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2519H-1*NPX-E-X

品名 TITLE: 2519-H1

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022/7/3

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°

