

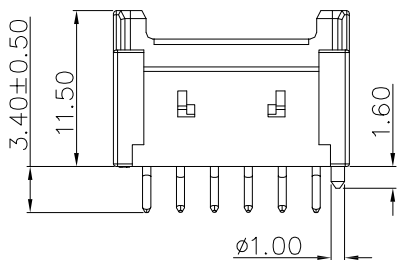


Recommended P.C.B Layout(T=1.6mm)

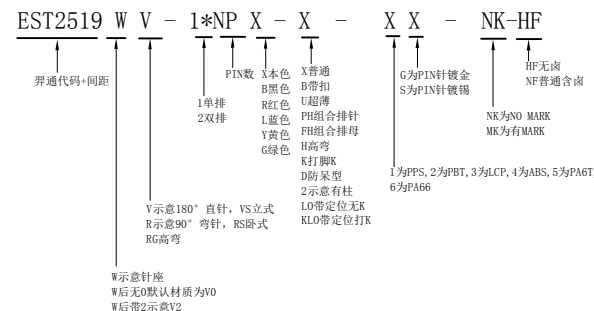

Poles	Dimensions/mm				
	A	E	B	C	D
2	2.50	5.70	3.90	7.40	
3	5.00	8.20	6.40	9.90	
4	7.50	10.70	8.90	12.40	
5	10.00	13.20	11.40	14.90	
6	12.50	15.70	13.90	17.40	
7	15.00	18.20	16.40	19.90	
8	17.50	20.70	18.90	22.40	
9	20.00	23.20	21.40	24.90	
10	22.50	25.70	23.90	27.40	
11	25.00	28.20	26.40	29.90	
12	27.50	30.70	28.90	32.40	
13	30.00	33.20	31.40	34.90	
14	32.50	35.70	33.90	37.40	
15	35.00	38.20	36.40	39.90	

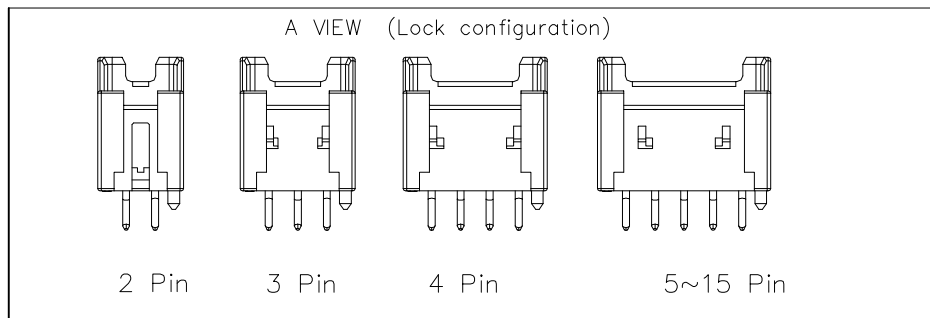

- Specifications:
- Voltage rating: 250V Max AC/DC
 - Current rating: 3.5A AC/DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -25°C~+ 85°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing: ≤40mΩ
 - Product Specification:



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2519WV-1*NPX-X

品名 TITLE: 2519直针

材料: 单位: MM 包装规格: 比例: 1:1
 制图: 审核: 核准: 日期: 2022/7/3

一般公差
GENERAL TOLERANCE
 X.X ±0.25
 X.XX ±0.20
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY