

13790510059


5

4


3

2

1

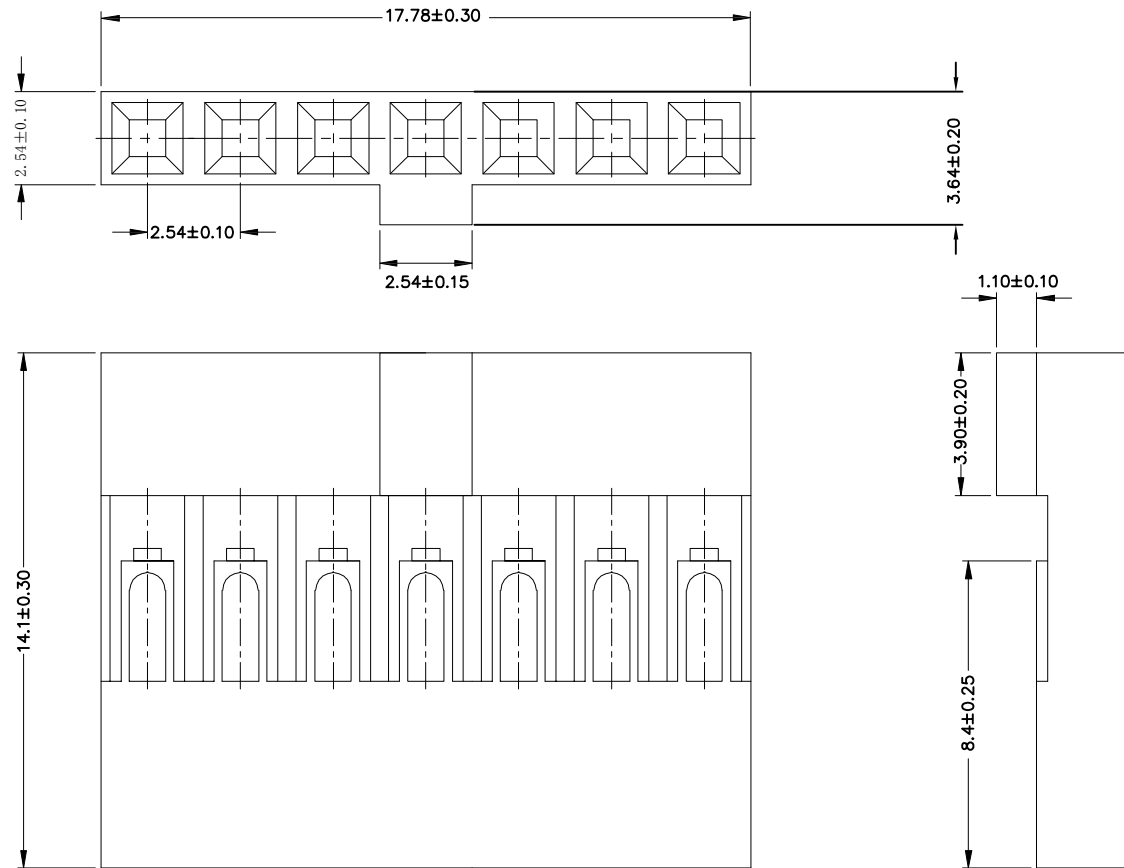

POLES	DIMENSION A(mm)	POLES	DIMENSION A(mm)
1X1	2.54	1X13	33.02
1X2	5.08	1X14	35.56
1X3	7.62	1X15	38.10
1X4	10.16	1X16	40.64
1X5	12.70	1X17	43.18
1X6	15.24	1X18	45.72
1X7	17.78	1X19	48.26
1X8	20.32	1X20	50.80
1X9	22.86	1X21	53.34
1X10	25.40	1X22	55.88
1X11	27.94	1X23	58.42
1X12	30.48	1X24	60.96

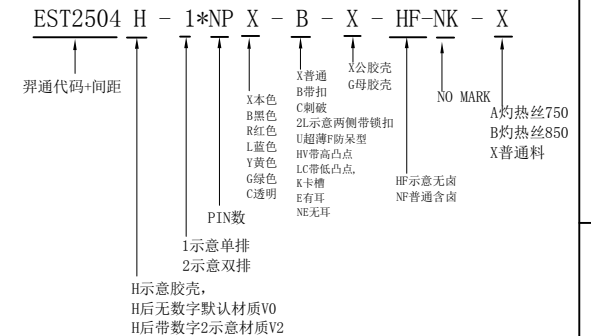

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max

■ HOUSING

- Poles: 1x1P-1x12P
- Material: PA66 UL94-V0
- Q' TY: 1000PCS/Bag

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504H-1*NPB-LC

品名 TITLE: 杜邦2..54-H(凸台)

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 5. 31

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



XJS