
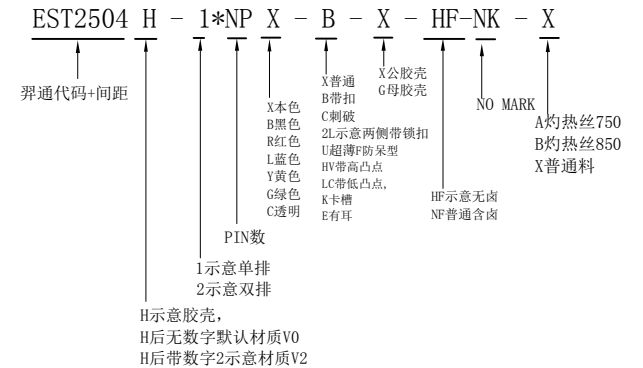


PART NO	DimenBion A (MM)
1P	2.54
2P	5.08
3P	7.62
4P	10.16
5P	12.7
6P	15.24
7P	17.78
8P	20.32

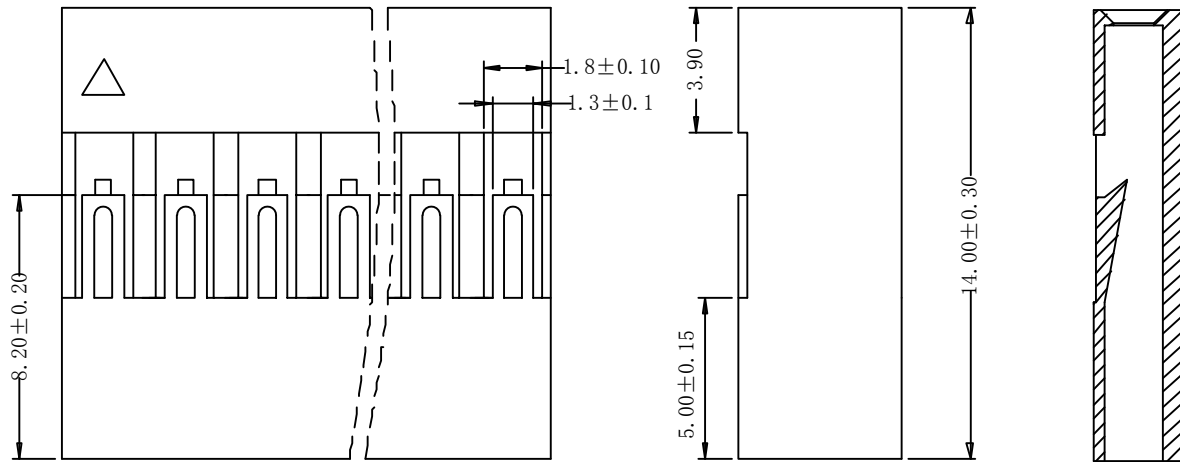

Technical parameters

- (1) Rated Voltage: 250V DC/AC (RMS)
- (2) Rated Current: 3A AC, DC
- (3) Withstanding voltage: 1000V AC/Minute
- (4) Working Temperature: -25° to +85°
- (5) INSULATION RESISTANCE: 1000mΩ Min
- (6) Contact resistance: Initial value/10M° MAX after environmental testing/20mΩ max

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504H-1*NPX-X-X

品名 TITLE: DB2.54-H单无凸

材料: PPO 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期:

一般公差
GENERAL TOLERANCE
X.X ±0.15
X.XX ±0.10
ANGLE ±1°

