

13790510059



5

4


3

2

1

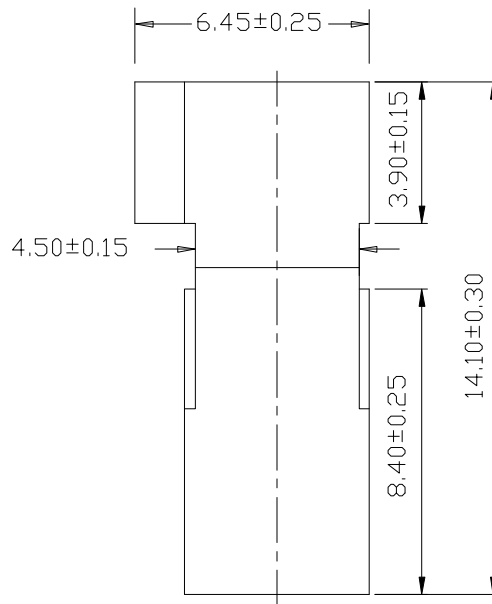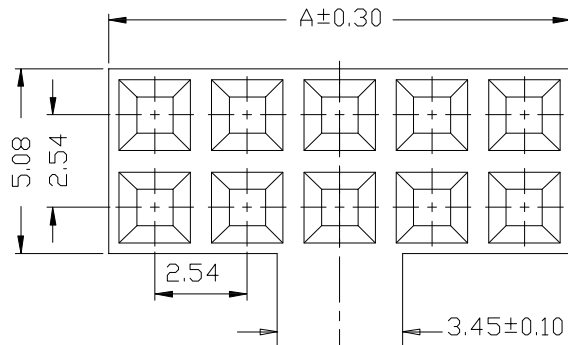

POLES	DIMENSION	POLES	DIMENSION
	A(mm)		A(mm)
2X2	5.08	2X14	35.56
2X3	7.62	2X15	38.10
2X4	10.16	2X16	40.64
2X5	12.70	2X17	43.18
2X6	15.24	2X18	45.72
2X7	17.78	2X19	48.26
2X8	20.32	2X20	50.80
2X9	22.86	2X21	53.34
2X10	25.40	2X22	55.88
2X11	27.94	2X23	58.42
2X12	30.48	2X24	60.96
2X13	33.02	2X25	63.5

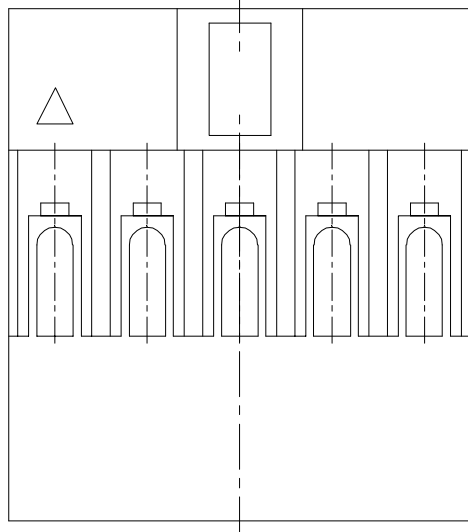

EST2504 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ H 示意胶壳, H后无数字默认材质V0, H后带数字2示意材质V2

↑ 1*NP X - B - X

↑ X 本色
B 黑色
R 红色
L 蓝色
Y 黄色
G 绿色
C 透明

↑ 2 示意单排
1 示意双排

↑ C 刺破
2L 示意两侧带锁扣
U 超薄
F 防呆型
HV 带高凸点
LC 带低凸点
K 卡槽
E 有耳

↑ X 普通
B 带扣
C 刺破
G 母胶壳

↑ X 公胶壳
G 母胶壳

↑ NO MARK

↑ HF 示意无卤
NF 普通含卤

↑ A 灼热丝750
B 灼热丝850
X 普通料

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Applicable wire: AWG#22 TO #28

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2504H-2*NPB-LC

品名 TITLE: DB 2.54-HC(双排低凸)

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022/7/13

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



XJS