

13790510059




5

4

3


2

1

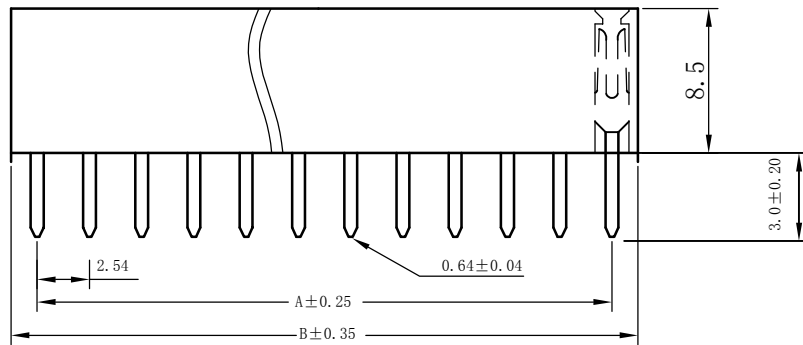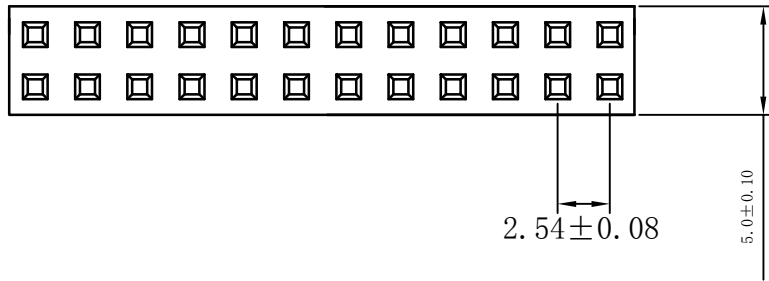

Dimensions List

Contacts	Dimensions	
	A	B
2*1	0	3.68
2*2	2.54	5.62
2*3	5.08	8.16
2*4	7.62	10.7
2*5	10.16	13.24
2*6	12.70	15.78
2*7	15.24	18.32
2*8	17.78	20.86
2*9	20.32	23.4
2*10	22.86	25.94
2*11	25.40	28.48
2*12	27.94	31.02
2*13	30.48	33.56
2*14	33.02	36.10
2*15	35.56	38.64
2*16	38.10	41.18
2*17	40.64	43.72
2*18	43.18	46.26
2*19	45.72	48.80
2*20	48.26	51.34

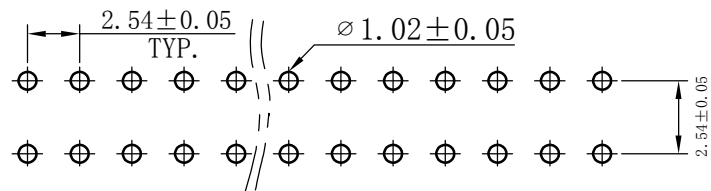

PCB LAYOUT

SPECIFICATIONS

Current Rating: 3Amps

Insulator resistance: 1000 Megohms min.

Dielectric Withstanding: AC 500V

Operating Temperature: -25°C to +85°C


Contact Material: Brass

Insulator Material: PBT

Plat: Gold flash

Unspecified tolerance: ±0.20

	H	PC
1	5.7	3.0
2	7.1	3.0
3	8.0	3.0
4	8.5	3.0
5	11.0	3.0

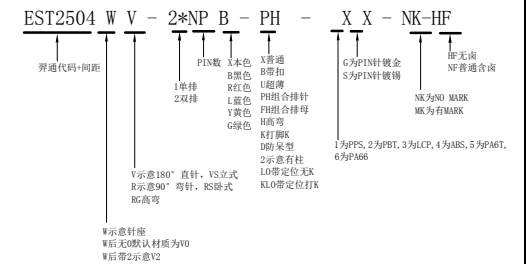

SPECIFICATIONS

Current Rating: 3Amps

Insulator resistance: 1000 Megohms min.

Dielectric Withstanding: AC 500V

Operating Temperature: -25°C to +85°C

Contact Material: Brass

Insulator Material: PBT

Plat: Gold flash

Unspecified tolerance: ±0.20



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504WV-2*NPX-X

品名 TITLE: DB2.54直针3.0(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022.7.13

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



XCL