

13790510059





5

4

3

2

1

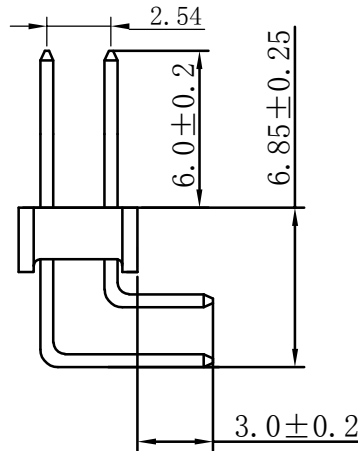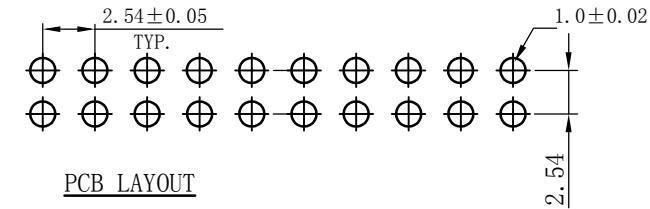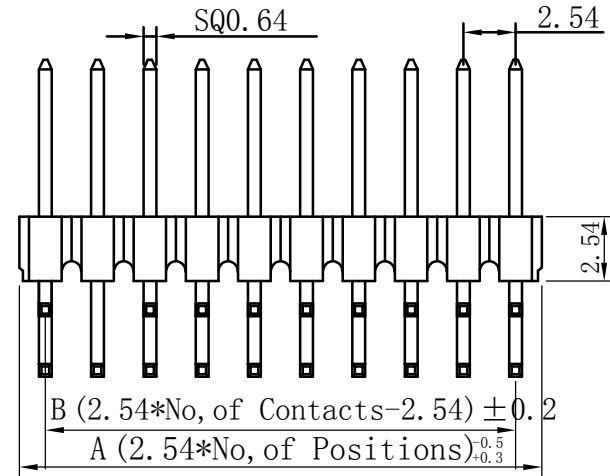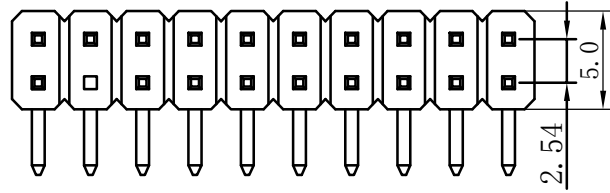

EST2504 W R - 2*NP B - PH - X X - NK-HF

弄通代码+间距
 W 示意针座
 后无0默认材质为V0
 W后带2示意V2
 PIN数
 1 单排
 2 双排
 X 本色
 B 黑色
 R 红色
 L 蓝色
 Y 黄色
 G 绿色
 X 普通
 B 带扣
 U 超薄
 PH 组合排针
 FH 组合排母
 H 高弯
 R 打脚K
 D 防呆型
 2 示意有柱
 L 0 带定位无K
 KLO 带定位打K
 G 为PIN针镀金
 S 为PIN针镀锡
 1 为PPS, 2 为PBT, 3 为LCP, 4 为ABS, 5 为PA6T, 6 为PA66
 NK 为NO MARK
 MK 为有MARK
 HF 无点
 NF 普通含点

Dimensions List

Contacts	Dimensions		Contacts	Dimensions	
	A	B		A	B
2*1	2.54	0	2*21	53.34	50.80
2*2	5.08	2.54	2*22	55.88	53.34
2*3	7.62	5.08	2*23	58.42	55.88
2*4	10.16	7.62	2*24	60.96	58.42
2*5	12.70	10.16	2*25	63.50	60.96
2*6	15.24	12.70	2*26	66.04	63.50
2*7	17.78	15.24	2*27	68.58	66.04
2*8	20.32	17.78	2*28	71.12	68.58
2*9	22.86	20.32	2*29	73.66	71.12
2*10	25.40	22.86	2*30	76.20	73.66
2*11	27.94	25.40	2*31	78.74	76.20
2*12	30.48	27.94	2*32	81.28	78.74
2*13	33.02	30.48	2*33	83.82	81.28
2*14	35.56	33.02	2*34	86.36	83.82
2*15	38.10	35.56	2*35	88.90	86.36
2*16	40.64	38.10	2*36	91.44	88.90
2*17	43.18	40.64	2*37	93.98	91.44
2*18	45.72	43.18	2*38	96.52	93.98
2*19	48.26	45.72	2*39	99.06	96.52
2*20	50.80	48.26	2*40	101.6	99.06

SPECIFICATIONS

Current Rating: 3Amps
 Insulator resistance: 1000 Megohms min.
 Dielectric Withstaanding: AC 500V
 Operating Temperature: -25°C TO+85°C
 Insulator Material: PA6T
 Contact Materiaal: Brass
 Plating: Gold flash

UNSPECIFIED TOLERANCE: ±0.20



东莞市羿通实业有限公司
 DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2504WR-2*NPX-X

品名 TITLE: DB2.54弯针3.0(双排)

材料: 单位: MM 包装规格: 比例: 1:1
 审核: 核准: 日期: 2022.7.13

一般公差
 GENERAL TOLERANCE
 X.X ±0.30
 X.XX ±0.25
 ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



XCL