
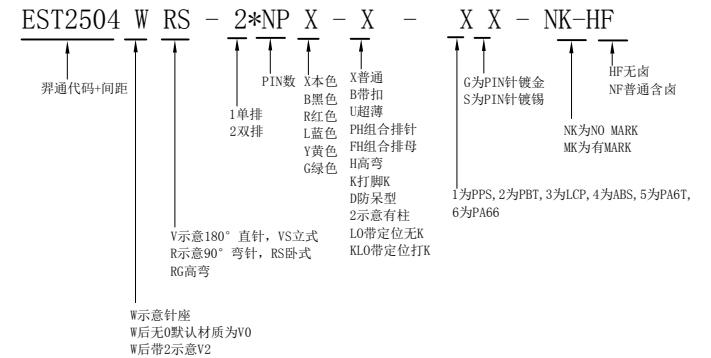
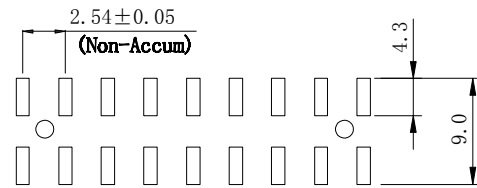

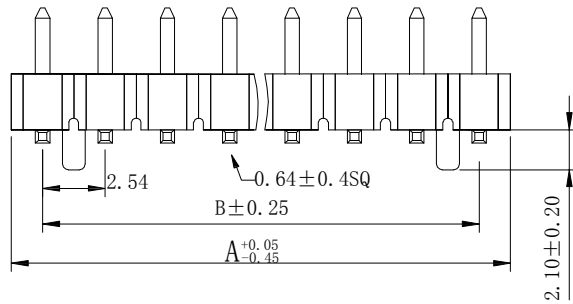


Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.54	0	21	53.34	50.80
2	5.08	2.54	22	55.88	53.34
3	7.62	5.08	23	58.42	55.88
4	10.16	7.62	24	60.96	58.42
5	12.70	10.16	25	63.50	60.96
6	15.24	12.70	26	66.04	63.50
7	17.78	15.24	27	68.58	66.04
8	20.32	17.78	28	68.58	68.58
9	22.86	20.32	29	71.12	68.58
10	25.40	22.86	30	73.66	71.12
11	27.94	25.40	31	76.20	73.66
12	30.48	27.94	32	78.74	76.20
13	33.02	30.48	33	81.28	78.74
14	35.56	33.02	34	83.82	81.28
15	38.10	35.56	35	86.36	83.82
16	40.64	38.10	36	88.90	86.36
17	43.18	40.64	37	91.44	88.90
18	45.72	43.18	38	93.98	91.44
19	48.26	45.72	39	96.52	93.98
20	50.80	48.26	40	101.6	96.52

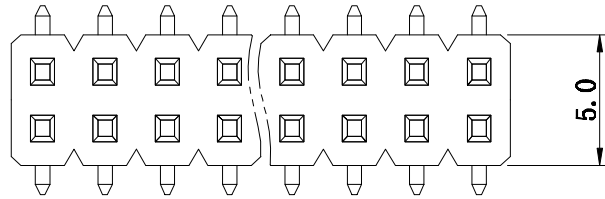

SPECIFICATIONS

Current rating: 3Amps
 Insulator resistance: 1000Megohms
 Dielectric withstanding: AC 500V
 Operating temperature: -25°C-85°C
 Contact material: Brass
 Plating: gold flash
 Insulator material: PA6T UNSPECIFIED TOLERANCE: ±0.2

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

EST **DGEASTOM** **东莞市羿通实业有限公司**
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504WRS-2*NPX-2				一般公差 GENERAL TOLERANCE X.X ±0.25 X.XX ±0.20 ANGLE ±1°
品名 TITLE: DB2.54立贴双排有柱				
材料:	单位: MM	包装规格:	比例: 1:1	日期: 2022.7.13
制图:	审核:	核准:	日期:	