
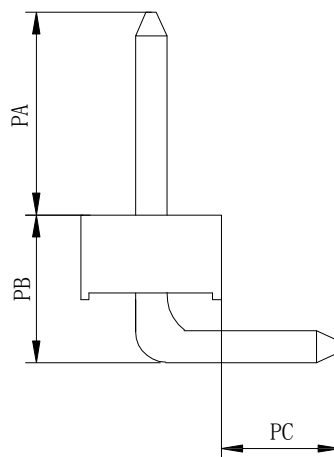


PCB LAYOUT

Plastic Base

Type	
H	2.5
PA	6.0
PB	4.3
PC	3.0

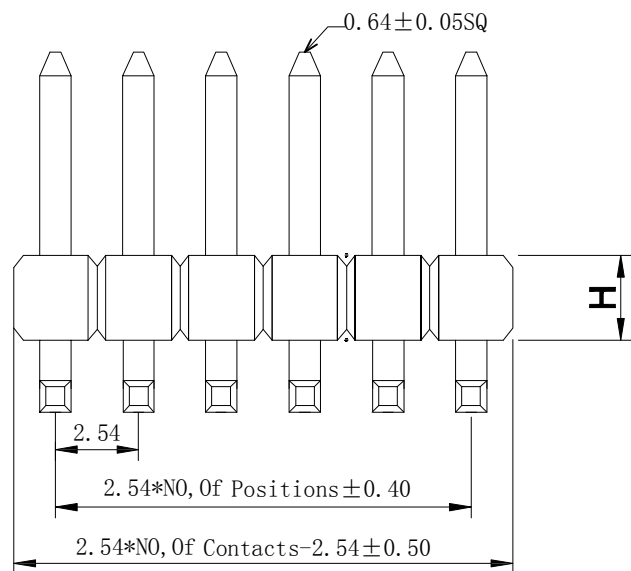

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 1.5A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Contactor Material: Brass
- Insulator Material: Pa6t
- Plating: Gold flash



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2504WR-1*NPB-X

品名 TITLE: DB2.54弯针 (单排)

材料: 黄铜 单位: MM 包装规格: 10K/卷 比例: 1:1
 制图: 胡宗星 审核: 陈长青 核准: 李海平 日期: 2022/7/15

一般公差
GENERAL TOLERANCE
X.X ±0.20
X.XX ±0.10
ANGLE ±5°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

